


X-Control, C-Poppet

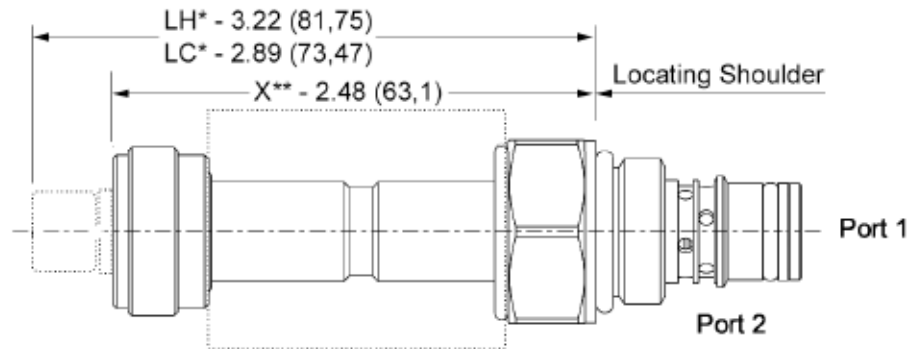

\*An additional 2.00 (50.8) clearance needed for coil installation and removal

Coil code is appended to the cartridge base model code. See CONFIGURATION section. in (mm)

**CARACTÉRISTIQUES** NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

Cavité	SC-08-02
Taille	0C
Capacité	30 L/min.
Fuite Maximale à 24 cSt (100 SUS)	1 cc/min.
Temps de Réponse - Typique	60 ms
Dimensions du six pans de la valve	22,2 mm
Couple de serrage de la valve	19 - 22 lbf ft
Poids du composant	0,15 kg

## OPTION SELECTION EXAMPLE: DFTBXCN

<b>DISPOSITIF DE CONTRÔLE</b>	<b>(X)</b>	<b>POPPET CONFIGURATION</b>	<b>(C)</b>	<b>MATIÈRE DES JOINTS</b>	<b>(N)</b>	<b>BOBINE</b>
<b>X</b> Non Réglable		<b>C</b> Normalement Fermé		<b>N</b> Buna N		Sans bobine
L Commande Manuelle - Réglable		H Normalement Ouvert				

### TECHNICAL FEATURES

- L'ensemble du doigt de gant du solénoïde est dimensionné pour fonctionner à 350 bar, hors limite de fatigue.

### PERFORMANCE CURVES

