


CONFIGURATION

E Control	External 4-SAE Drain Port
H Minimum Pilot Pressure	400 psi (28 bar)
N Seal Material	Buna-N
Material/Coating	

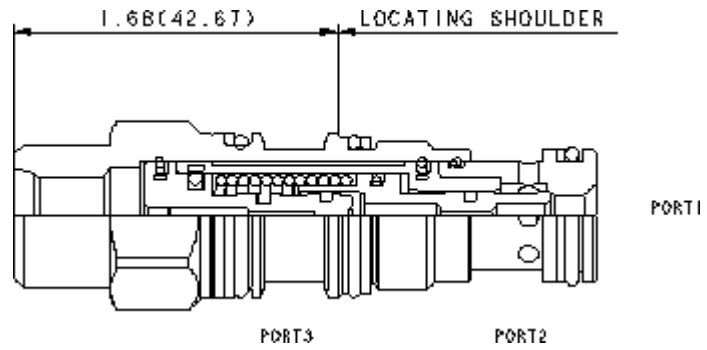

TECHNICAL DATA NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

cavidad	T-11A
Series	1
Capacity	60 L/min.
Maximum Operating Pressure	350 bar
Minimum Pilot Pressure Required to Shift Valve	28 bar
Maximum Valve Leakage at 110 SUS (24 cSt)	0,7 cc/min.@350 bar
Pilot Volume Displacement	0,16 cc
Valve Hex Size	22,2 mm
Valve Installation Torque	41 - 47 Nm
Seal kit - Cartridge	Buna: 990-311-007
Seal kit - Cartridge	Viton: 990-311-006

OPTION SELECTION EXAMPLE: DKDCEHN

CONTROL	(E) MINIMUM PILOT PRESSURE	(H) SEAL MATERIAL	(N) MATERIAL/COATING
E External 4- <small>SAE</small> Drain Port	H 400 psi (28 bar)	N Buna-N	Standard Material/Coating
X Standard Pilot, Atmospheric Vent		E EPDM V Viton	/LH Mild Steel, Zinc-Nickel

TECHNICAL FEATURES

- Unique balanced construction provides predictable switching with 5000 psi (350 bar) at both ports 1 and 2, with the external drain open and a minimum pilot pressure of 400 psi (30 bar).
- These valves have positive seals between port 2 and the pilot area.
- These valves are hydraulically balanced between port 1 and port 2.
- Leakage rate between port 1 and port 2 is very low, typically less than 10 drops/min. at 5000 psi (0,7 cc/min at 350 bar).
- Valve will reseal when the pilot pressure falls below 145 psi (10 bar).
- These 3-port balanced logic valves use the same cavity as unbalanced logic valves of the same frame size and can be considered functional replacements.
- Available in external atmospheric vent (X control) or static external drain (E control) configurations.
- Three-port vented logic elements with the X control are atmospherically referenced and considered problem solvers for existing circuits using non-vented valves. Over time, these valves will eventually leak externally and/or allow moisture into the spring chamber. Four-port valves are recommended for new applications. Alternately, the external vent port can be connected to drain if the static drain port option (control option E) is selected. Removing the vent plug will convert an X control to an E control.
- Port 1 and port 2 are fully sealed from port 3.
- All ports will accept 5000 psi (350 bar).
- Incorporates the Sun floating style construction to minimize the possibility of internal parts binding due to excessive installation torque and/or cavity/cartridge machining variations.

PERFORMANCE CURVES

