



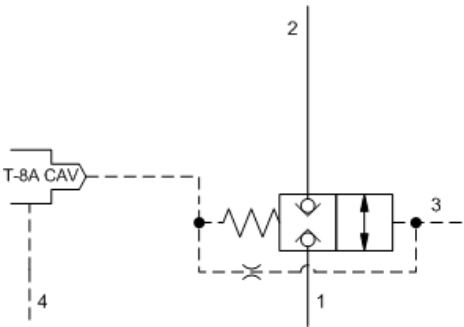

CONFIGURATION

H 300 psi (20 bar)
N

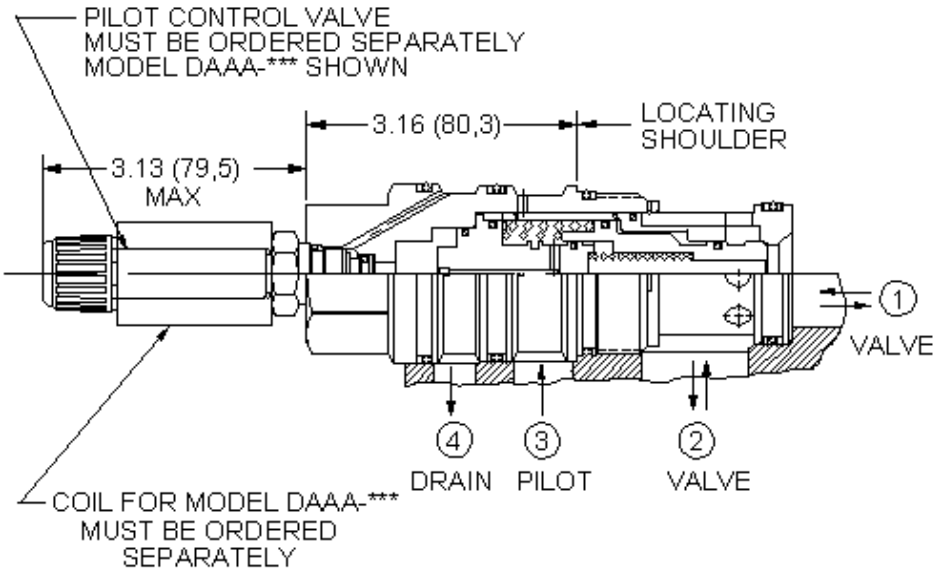

T-8A T-8A 2 2 3

TECHNICAL DATA NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

	T-24A
	4
	480 L/min.
	350 bar
	20 bar
110 SUS (24 cSt)	0,7 cc/min.@350 bar
	T-8A
	22,2 mm
	27 - 33 Nm
	See Performance Data
	41,3 mm
	474 - 508 Nm
	1.49 kg.
Seal kit - Cartridge	Buna: 990-024-007
Seal kit - Cartridge	Polyurethane: 990-024-002
Seal kit - Cartridge	Viton: 990-024-006

OPTION SELECTION EXAMPLE: DKJR8HN

(H)

(N)

H 300 psi (20 bar)

N

V

TECHNICAL FEATURES

- 1 2 5000 psi (350 bar) 400 psi (30 bar)
- 1 2
- 1 2 3 4 3 4
-
- 1 2 5000psi 10 / 350bar 0,7 cc/min
- 145 psi 10 bar
- T-8A T-8A
- T-8A T-8A
- 5000 psi (350 bar)
- Sun /

PERFORMANCE CURVES

