


X-Control, A-Spool

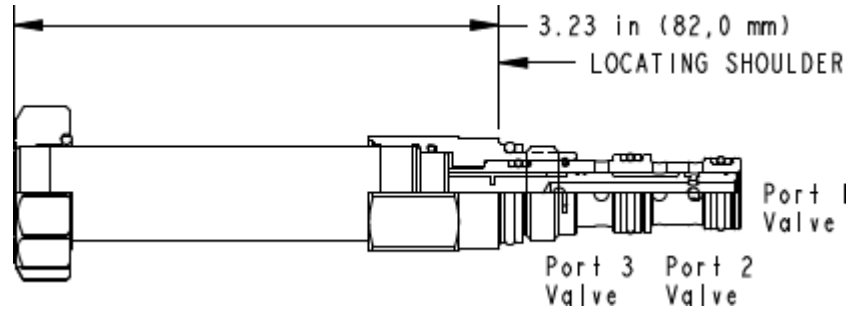

**TECHNICAL DATA** NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

Maximum Operating Pressure	210 bar
Typical Valve Leakage at 110 SUS (24 cSt) from port 1 to port 3	50 cc/min.@210 bar
Response Time - Typical	50 ms
Switching Frequency	15,000 max. cycles/hr
Seal kit - Cartridge	Buna: 990-150-007
Seal kit - Cartridge	Viton: 990-150-006
Seal kit - Cartridge	Buna: 990-150-007
Seal kit - Cartridge	Viton: 990-150-006

**CONFIGURATION OPTIONS**

**Model Code Example: DMBDXAN**

CONTROL	(X)	SPOOL CONFIGURATION	(A)	SEAL MATERIAL	(N)	BOBINA	(812L)
<b>X</b> No Manual Override		<b>A</b> Normally Open 1 to 2, Closed 2 to 3		<b>N</b> Buna-N		No Coil	
<b>P</b> Manual Pull Override		<b>N</b> Normally Open 2 to 3, Closed 1 to 2		<b>V</b> Viton			