


X-Control, A-Spool

### CONFIGURATION

<b>X</b> Control	No Manual Override
<b>N</b> Spool Configuration	Normally Open 2 to 3, Closed 1 to 2
<b>N</b> Seal Material	Buna-N
	bobina

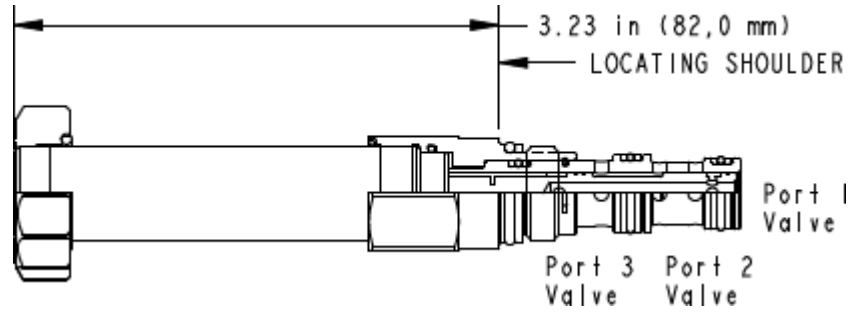

### TECHNICAL DATA

NOTE:

		DATA
cavidad	T-150A	MAY
Series	0	VARY
Capacity	15 L/min.	BY
Maximum Operating Pressure	350 bar	
Typical Valve Leakage at 110 SUS (24 cSt) Inlet on 1	164 cc/min.@350 bar	
Typical Valve Leakage at 110 SUS (24 cSt) Inlet on 2 or 3	82 cc/min.@350 bar	
Response Time - Typical	50 ms	
Switching Frequency	15,000 max. cycles/hr	
Solenoid Tube Diameter	16 mm	
Valve Hex Size	19,1 mm	
Valve Installation Torque	35 - 40 Nm	
Model Weight	0.19 kg.	
Seal and nut kit - Coil	Viton: 990-740-006	
Seal kit - Cartridge	Buna: 990-150-007	
Seal kit - Cartridge	Viton: 990-150-006	

CONFIGURATION. SEE  
CONFIGURATION SECTION.

# OPTION SELECTION EXAMPLE: DMBFXNN

<b>CONTROL</b>	<b>(X)</b>	<b>SPOOL CONFIGURATION</b>	<b>(N)</b>	<b>SEAL MATERIAL</b>	<b>(N)</b>	<b>BOBINA</b>	<b>(JN23BD)</b>
<b>X</b> No Manual Override		<b>N</b> Normally Open 2 to 3, Closed 1 to 2		<b>N</b> Buna-N		No coil	
<b>P</b> Manual Pull Override		<b>A</b> Normally Open 1 to 2, Closed 1 to 3		<b>E</b> EPDM			
				<b>V</b> Viton			

## PERFORMANCE CURVES

