


X-Control, A-Spool

**CONFIGURATION**

X		
N	2-3	1-2
N		

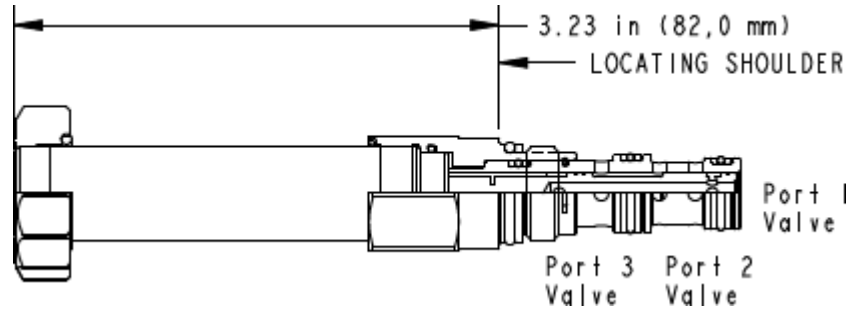

FLeX 2 3

NOTE: DATA MAY VARY FROM LISTED DATA. SEE CONFIGURATION SECTION.

**TECHNICAL DATA**

	T-150A
	0
	15 L/min.
	350 bar
110 SUS (24 cSt) 1	164 cc/min.@350 bar
110 SUS (24 cSt) 2 3	82 cc/min.@350 bar
	50 ms
	15,000 max. cycles/hr
	16 mm
	19,1 mm
	35 - 40 Nm
	0.19 kg.
Seal and nut kit - Coil	Viton: 990-740-006
Seal kit - Cartridge	Buna: 990-150-007
Seal kit - Cartridge	Viton: 990-150-006
Seal kit - Cartridge	Buna: 990-150-007
Seal kit - Cartridge	Viton: 990-150-006

- : • Sun
- 2.00 inches (50,8 mm)

# OPTION SELECTION EXAMPLE: DMBFXNN

	(X)	(N)	(N)	(812)
<b>X</b>	<b>N</b> 2-3 1-2	<b>N</b>		
P	A 1-2 1-3	E EPDM		
		V		

## TECHNICAL FEATURES

- 
- 1000
- NFPA T2.6.1 R2014
- CFD
- - 1000
- IP69K
- 
- 
- Sun /

## PERFORMANCE CURVES

