


X-Control, A-Spool

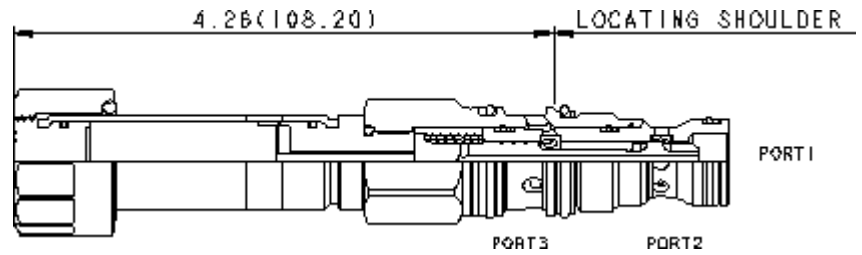

TECHNICAL DATA NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

Maximum Operating Pressure	350 bar
Manual Override Force Requirement	33 N/100 bar @ Port 1
Manual Override Stroke	2,5 mm
Maximum Valve Leakage at 110 SUS (24 cSt)	80 cc/min.@210 bar
Response Time - Typical	50 ms
Switching Frequency	15,000 max. cycles/hr
Seal kit - Cartridge	Buna: 990-411-007
Seal kit - Cartridge	EPDM: 990-411-014
Seal kit - Cartridge	Viton: 990-411-006
Seal kit - Cartridge	Buna: 990-411-007
Seal kit - Cartridge	EPDM: 990-411-014
Seal kit - Cartridge	Viton: 990-411-006

CONFIGURATION OPTIONS

Model Code Example: **DMDAXAN**

CONTROL	(X)	SPOOL CONFIGURATION (A)	SEAL MATERIAL (N)	BOBINA (936)	MATERIAL/COATING
X No Manual Override		A Normally Open 1 to 2, Closed 2 to 3	N Buna-N	No Coil	Standard Material/Coating
D Twist/Lock (Dual) Manual Override		B Normally Open 1 to 2, Closed 2 to 3, Closed Transition	E EPDM		/LH Mild Steel, Zinc-Nickel
L Twist/Lock (Detent) Manual Override		N Normally Open 2 to 3, Closed 1 to 2	V Viton		
M activador manual		P Normally Open 1 to 3, Closed 1 to 2			
T Twist (Momentary) Manual Override		R Normally Open 2 to 3, Closed 1 to 2, Closed Transition			