


X-Control, X-Spool

CONFIGURATION

- X _____
- _____
- _____
- _____

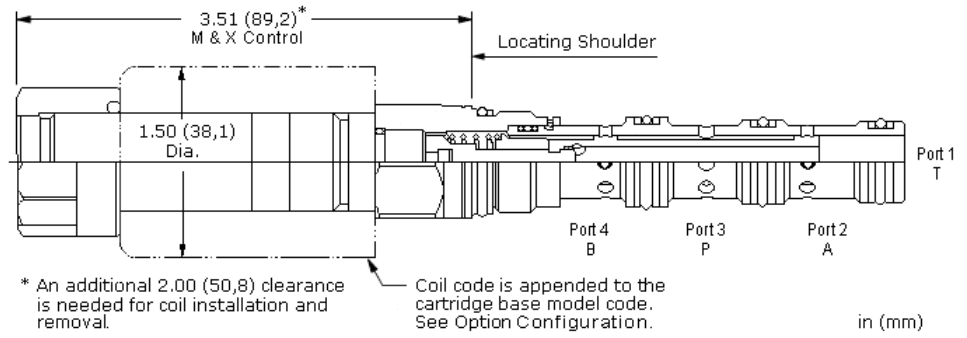

2 4

TECHNICAL DATA NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

	T-31A
	1
	30 L/min.
	350 bar
110 SUS (24 cSt)	160 cc/min. @210 bar
	2,5 mm
	33 N/100 bar @ Port 1
	50 ms
	15,000 max. cycles/hr
	19 mm
	22,2 mm
	41 - 47 Nm
	0,30 kg
Seal and nut kit - Coil	Viton: 990-770-006
Seal kit - Cartridge	Buna: 990-431-007
Seal kit - Cartridge	EPDM: 990-431-014
Seal kit - Cartridge	Viton: 990-431-006
Seal kit - Cartridge	Buna: 990-431-007
Seal kit - Cartridge	EPDM: 990-431-014
Seal kit - Cartridge	Viton: 990-431-006

OPTION SELECTION EXAMPLE: DNCA_{XN}

	(X)	(Z)	(N)	
X		Z A-B-T	N	
D /		A A-T	E EPDM	212 DIN 43650 A 12 VDC
L		B B-T	V	224 DIN 43650 A 24 VDC
M		C		912 Deutsch DT04-2P 12 VDC
T ()		J		924 Deutsch DT04-2P 24 VDC
		L P-A B-T		
		S P-A-B		
		T P-T		
		W A B T		
		X		

TECHNICAL FEATURES

- 3 1
- 5000 psi (350 bar)
- EPDM
- /
- Sun 1
- IP69K
- Sun /

PERFORMANCE CURVES

