



X-Control, N-Spool

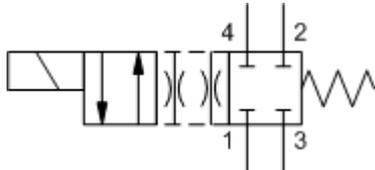

X-Control, C-Spool

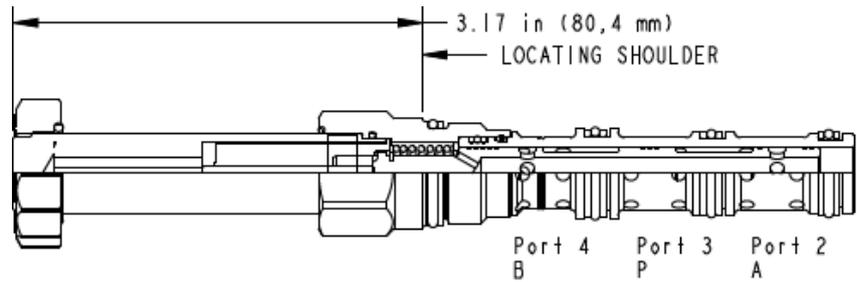

2 4

TECHNICAL DATA NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

	T-31A
	1
	40 L/min.
	350 bar
110 SUS (24 cSt)	160 cc/min.@210 bar
	2,5 mm
	33 N/100 bar @ Port 1
	50 ms
	15,000 max. cycles/hr
	16 mm
	4,8 - 5,3 Nm
	22,2 mm
	41 - 47 Nm
	0.27 kg.
Seal and nut kit - Coil	Viton: 990-740-006
Seal kit - Cartridge	Buna: 990-431-007
Seal kit - Cartridge	Viton: 990-431-006
Seal kit - Cartridge	Buna: 990-431-007
Seal kit - Cartridge	Viton: 990-431-006

OPTION SELECTION EXAMPLE: DNDFXNN

	(X)	(N)	(N)	
X	N	N		
D /	C	V		
L	E			
M	T P-T			
T ()				

TECHNICAL FEATURES

- 5000 psi (350 bar)
-
- - 1000
- IP69K
- D L
- /
- Sun /

PERFORMANCE CURVES

