


L-Control, N-Spool

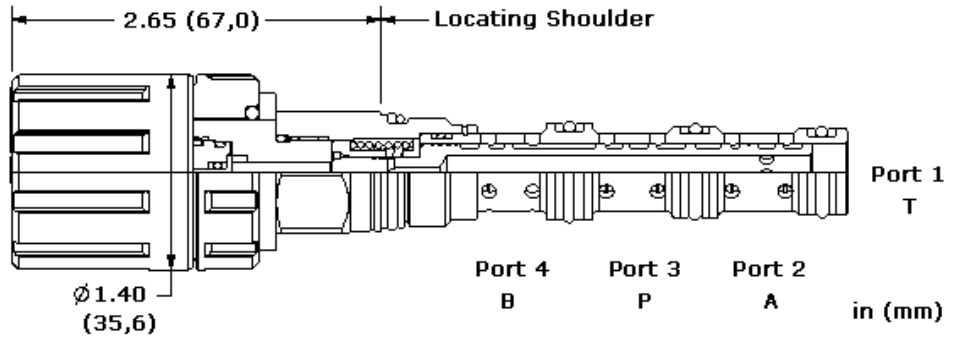

**CONFIGURATION**

- 
- 
- 

2 4

**TECHNICAL DATA** NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

	T-31A
	1
	40 L/min.
	350 bar
110 SUS (24 cSt)	160 cc/min. @210 bar
	1,2 Nm
	22,2 mm
	41 - 47 Nm
Seal kit - Cartridge	Buna: 990-431-007
Seal kit - Cartridge	EPDM: 990-431-014
Seal kit - Cartridge	Viton: 990-431-006
Seal kit - Cartridge	Buna: 990-431-007
Seal kit - Cartridge	EPDM: 990-431-014
Seal kit - Cartridge	Viton: 990-431-006


OPTION SELECTION EXAMPLE: DNDMNN

(L)	(Y)	(N)
<b>L</b>	<b>Y</b> A-B-T	<b>N</b>
D /	C	E EPDM
T ( )	D	V
	E	
	H	
	L P-A B-T	
	N	
	R P-A-B	
	T P-T	
	U P-T	

TECHNICAL FEATURES

- 7000
- / "T"
- / "L"
- "D"
- EPDM
- Sun

PERFORMANCE CURVES

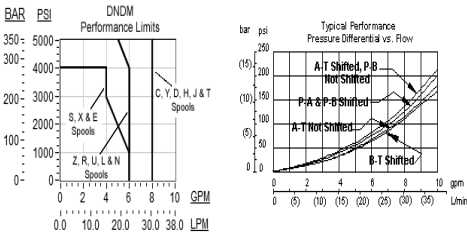

Note: Performance limits are derived with 4-way operation and symmetrical flow. For valve applications where either asymmetrical flow or 3-way operation is present, these performance limits may be reduced.