


X-Control, N-Spool

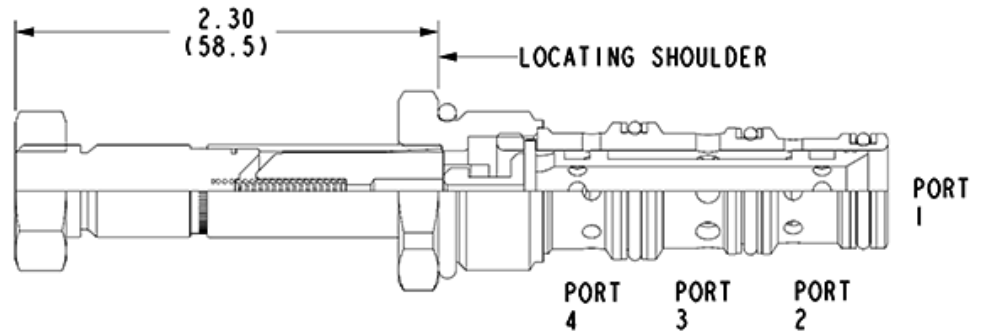

TECHNICAL DATA NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

cavidad	SC-10-04
Series	1C
Capacity	30 L/min.
Maximum Operating Pressure	210 bar
Typical Valve Leakage at 110 SUS (24cSt)	30 cc/min.@210 bar
Response Time - Typical	50 ms
Switching Frequency	15,000 max. cycles/hr
Solenoid Tube Diameter	12,7 mm
Coil Nut Torque	4,8 - 5,3 Nm
Valve Hex Size	25 mm
Valve Installation Torque	32,5 - 37,9 Nm
Model Weight	0.11 kg.

OPTION SELECTION EXAMPLE: DNUTXNN

CONTROL	(X)	SPOOL CONFIGURATION	(N)	SEAL MATERIAL	(N)	BOBINA	(924D)
X -		N Through, Shift to Cross		N Buna-N		No Coil	

PERFORMANCE CURVES

