


**CONFIGURATION**

Seal Material

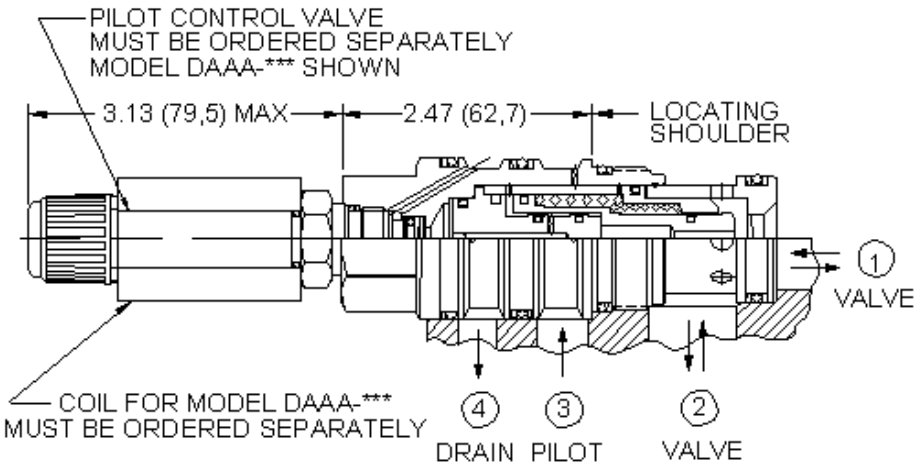

This is a normally open, balanced poppet, switching element with an integral T-8A control cavity. With a 2-way valve in the closed position installed in the T-8A control cavity, the poppet remains open. Opening the 2-way valve shifts the poppet to the closed position, provided there is sufficient pressure at port 3.

**TECHNICAL DATA**

Maximum Operating Pressure	5000 psi
Minimum Pilot Pressure Required to Shift Valve	300 psi
Control Pilot Flow	See Performance Data
Maximum Valve Leakage at 110 SUS (24 cSt)	10 drops/min.@5000 psi
Pilot Control Cavity	T-8A
Pilot Control Valve Hex Size	7/8 in.
Pilot Control Valve Installation Torque	20 - 25 lbf ft
Seal kit - Cartridge	Buna: 990-023-007
Seal kit - Cartridge	Polyurethane: 990-023-002
Seal kit - Cartridge	Viton: 990-023-006

**CONFIGURATION OPTIONS**

Model Code Example: DOHR8HN

**SEAL MATERIAL**

(V)

V Viton

N Buna-N