




CONFIGURATION

X	Control	Not Adjustable
H	Shifting Pressure	200 psi (14 bar)
N	Seal Material	Buna-N
	Material/Coating	

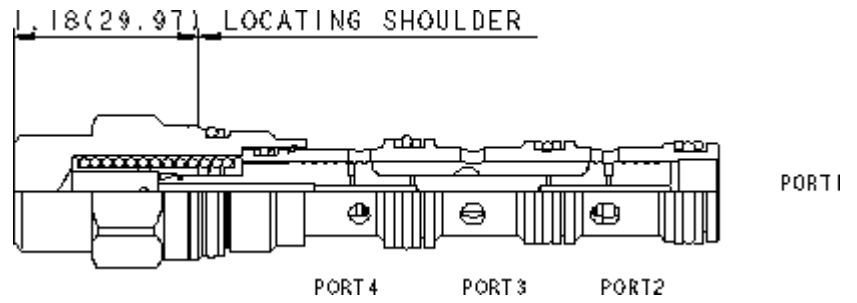

NOTE: DATA MAY VARY FROM TECHNICAL DATA SEE CONFIGURATION SECTION.

cavidad	T-31A
Series	1
Capacity	40 L/min.
Maximum Operating Pressure	350 bar
Pilot Flow	0,38 L/min.
Valve Hex Size	22,2 mm
Valve Installation Torque	41 - 47 Nm
Model Weight	0.17 kg.
Seal kit - Cartridge	Buna: 990-031-007
Seal kit - Cartridge	Polyurethane: 990-031-002
Seal kit - Cartridge	Viton: 990-031-006
Seal kit - Cartridge	Buna: 990-031-007
Seal kit - Cartridge	Polyurethane: 990-031-002
Seal kit - Cartridge	Viton: 990-031-006

OPTION SELECTION EXAMPLE: DSCHXHN

CONTROL	(X) SHIFTING PRESSURE	(H) SEAL MATERIAL	(N) MATERIAL/COATING
X Not Adjustable	H 200 psi (14 bar) G 150 psi (10,5 bar)	N Buna-N V Viton	Standard Material/Coating /LH Mild Steel, Zinc-Nickel

PERFORMANCE CURVES

