




CONFIGURATION

X	
H	200 psi (14 bar)
N	
Material/Coating	

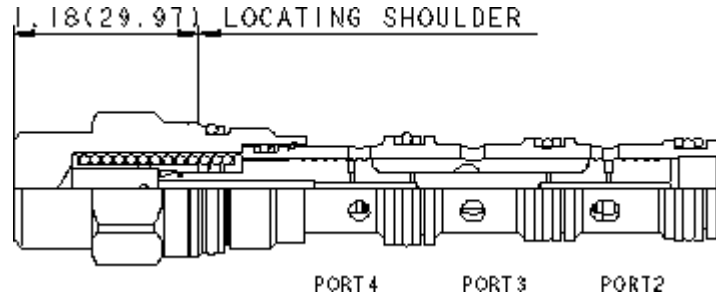

2 4

NOTE: DATA MAY VARY FROM TECHNICAL DATA. SEE CONFIGURATION SECTION.

	T-31A
	1
	40 L/min.
	350 bar
	0,38 L/min.
	22,2 mm
	41 - 47 Nm
	0.17 kg.
Seal kit - Cartridge	Buna: 990-031-007
Seal kit - Cartridge	Polyurethane: 990-031-002
Seal kit - Cartridge	Viton: 990-031-006
Seal kit - Cartridge	Buna: 990-031-007
Seal kit - Cartridge	Polyurethane: 990-031-002
Seal kit - Cartridge	Viton: 990-031-006

OPTION SELECTION EXAMPLE: DSCHXHN

(X)	(H)	(N)	MATERIAL/COATING
X	H 200 psi (14 bar) E 75 psi (5 bar) G 150 psi (10,5 bar)	N V	Standard Material/Coating /LH -

TECHNICAL FEATURES

-
- 2 4 3
-
-
- 4 1
- Sun

PERFORMANCE CURVES

