


CONFIGURATION

C
N

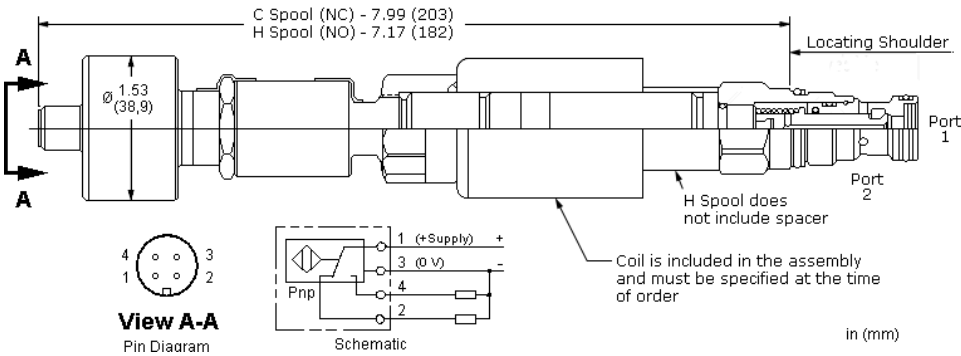

2 2

SWITCH SPECIFICATIONS

	20-30 VDC
	-25 to 80 °C
	≥ 50g, 0-500 impulses/sec
	>50 g, 1ms
	≤ 400 mA, Duty Ratio 100%
	Yes, Load Short Unlimited
	≤ 25 ms
	≤ .002 in.
- 0-80 °C ≤ ±	0,1 mm
	DIN EN 61000-6-1/2/3/4
	M12 X 1 (4) Pin
	IP65
Seal kit - Cartridge	Buna: 990-413-007
Seal kit - Cartridge	EPDM: 990-413-014
Seal kit - Cartridge	Polyurethane: 990-413-002
Seal kit - Cartridge	Viton: 990-413-006

TECHNICAL DATA NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

	T-13A
	1
	23 L/min.
	350 bar
110 SUS (24 cSt)	0,7 cc/min.@350 bar
	50 ms
	15,000 max. cycles/hr
	19 mm
	22,2 mm
	41 - 47 Nm
	0,25 kg

OPTION SELECTION EXAMPLE: DTCAZCN

(C)

(N)

C	N
H	E EPDM
	V

TECHNICAL FEATURES

-
- CE
-
- 5000 psi (350 bar)
-
-
- EPDM
- /
-
- Sun /

PERFORMANCE CURVES

