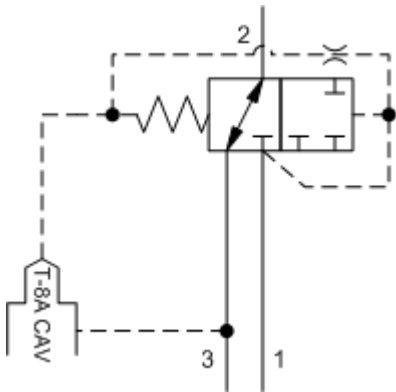


**TECHNICAL DATA** NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

|                                           |                           |
|-------------------------------------------|---------------------------|
| Maximum Operating Pressure                | 350 bar                   |
| Control Pilot Flow                        | 0,16 - 0,25 L/min.        |
| Maximum Valve Leakage at 110 SUS (24 cSt) | 30 cc/min.@70 bar         |
| Pilot Control Cavity                      | T-8A                      |
| Seal kit - Cartridge                      | Buna: 990-202-007         |
| Seal kit - Cartridge                      | Polyurethane: 990-002-002 |
| Seal kit - Cartridge                      | Viton: 990-202-006        |
| Seal kit - Cartridge                      | Buna: 990-202-007         |
| Seal kit - Cartridge                      | Polyurethane: 990-002-002 |
| Seal kit - Cartridge                      | Viton: 990-202-006        |

**CONFIGURATION OPTIONS**

**Model Code Example: DVCA8FN**

| CONTROL | (8)          | MINIMUM CONTROL PRESSURE | (F)             | SEAL MATERIAL | (N)    |
|---------|--------------|--------------------------|-----------------|---------------|--------|
| 8       | cavidad T-8A | F                        | 100 psi (7 bar) | N             | Buna-N |
|         |              |                          |                 | V             | Viton  |