


X-Control, N-Poppet

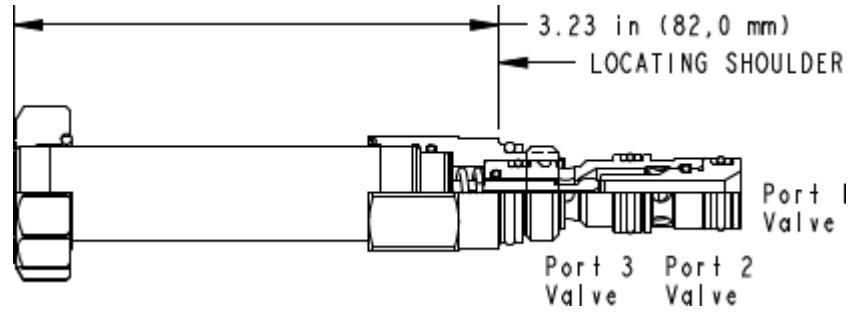

CONFIGURATION

| | | |
|----------|----------------------|-------------------------------------|
| X | Control | No Manual Override |
| A | Poppet Configuration | Normally Open 1 to 2, Closed 2 to 3 |
| N | Seal Material | Buna-N |
| | bobina | |

TECHNICAL DATA

NOTE:

| | | DATA |
|---|-----------------------|------|
| cavidad | T-150A | MAY |
| Series | 0 | VARY |
| Capacity | 23 L/min. | BY |
| Maximum Operating Pressure | 350 bar | |
| Maximum Valve Leakage at 110 SUS (24 cSt) | 0,07 cc/min.@350 bar | |
| Response Time - Typical | 50 ms | |
| Switching Frequency | 10,000 max. cycles/hr | |
| Solenoid Tube Diameter | 16 mm | |
| Valve Hex Size | 19,1 mm | |
| Valve Installation Torque | 35 - 40 Nm | |
| Model Weight | 0.19 kg. | |
| Seal and nut kit - Coil | Viton: 990-740-006 | |
| Seal kit - Cartridge | Buna: 990-150-007 | |
| Seal kit - Cartridge | Viton: 990-150-006 | |
| U.S. Patent # | 10,302,201 | |

CONFIGURATION. SEE CONFIGURATION SECTION.

OPTION SELECTION EXAMPLE: DWBFXAN

| CONTROL | (X) | POPPET CONFIGURATION | (A) | SEAL MATERIAL | (N) | BOBINA | (JN23BD) |
|--|-----|--|-----|-----------------|-----|---------|----------|
| X No Manual Override | | A Normally Open 1 to 2, Closed 2 to 3 | | N Buna-N | | No coil | |
| D Twist/Lock (Dual) Manual Override | | | | E EPDM | | | |
| L Twist/Lock (Detent) Manual Override | | N Normally Open 2 to 3, Closed 1 to 2 | | V Viton | | | |
| M activador manual | | | | | | | |
| T Twist (Momentary) Manual Override | | | | | | | |

PERFORMANCE CURVES

