


CONFIGURATION

X Control	Not Adjustable
A Setting Range	Replaceable Orifice .1 - 3 gpm (0,4 - 11 L/min.)
N Seal Material	Buna-N
Material/Coating	

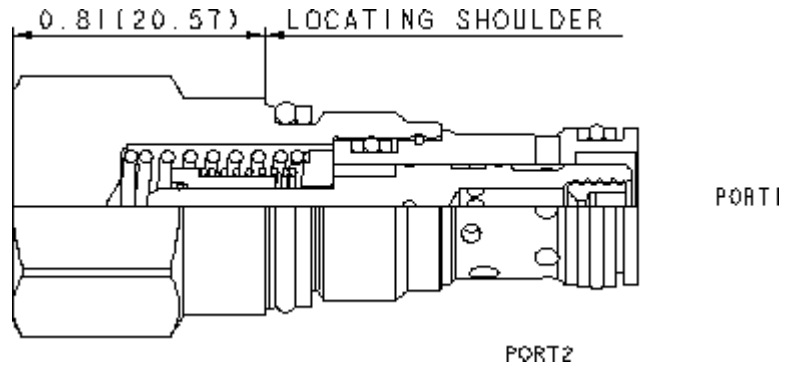

Fixed-orifice, pressure-compensated flow controls with reverse-flow check provide precise flow regulation for meter-in or meter-out applications where there may be wide pressure fluctuations. An integral high-capacity check valve provides unrestricted flow from port 2 to port 1. The flow setting is specified by the user and is set at the factory.

TECHNICAL DATA

Maximum Operating Pressure	5000 psi
Locknut Hex Size	9/16 in.
Locknut Torque	80 - 90 lbf in.
Seal kit - Cartridge	Buna: 990-162-007
Seal kit - Cartridge	Polyurethane: 990-162-002
Seal kit - Cartridge	Viton: 990-162-006

CONFIGURATION OPTIONS

Model Code Example: FCBBXAN

CONTROL	(X)	SETTING RANGE	(A)	SEAL MATERIAL	(N)	MATERIAL/COATING	(/LH)
X Not Adjustable		A Replaceable Orifice .1 - 3 gpm (0,4 - 11 L/min.)		N Buna-N		/LH Mild Steel, Zinc-Nickel	
C Tamper Resistant - Factory Set				V Viton		/AP Stainless Steel, Passivated	
K Handknob						Standard Material/Coating	
L Tuning Adjustment							