




CONFIGURATION

X	
C	.106 gpm (.4 L/min.)
N	
Material/Coating	

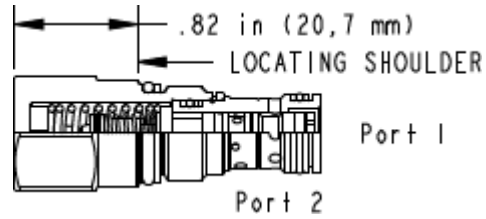

2 1

TECHNICAL DATA

	350 bar
	15 mm
	9 - 10 Nm
Seal kit - Cartridge	Buna: 990-162-007
Seal kit - Cartridge	Polyurethane: 990-162-002
Seal kit - Cartridge	Viton: 990-162-006

CONFIGURATION OPTIONS

Model Code Example: FCBCXCN

(X)	(C)	(N)	MATERIAL/COATING
X	C .106 gpm (.4 L/min.)	N	Standard Material/Coating
C	D .132 gpm (.49 L/min.)	V	IAP
L	F .198 gpm (.75 L/min.)		
	G .291 gpm (1.10 L/min.)		
	H .41 gpm (1.55 L/min.)		
	J .528 gpm (2.0 L/min.)		
	K .661 gpm (2.50 L/min.)		
	L .819 gpm (3.10 L/min.)		
	M 1.057 gpm (4.00 L/min.)		
	N 1.321 gpm (5.00 L/min.)		
	P 1.585 gpm (6.0 L/min.)		
	R 2.008 gpm (7.6 L/min.)		
	S 2.378 gpm (9.0 L/min.)		
	T 2.642 gpm (10.0 L/min.)		
	V 3.012 gpm (11.40 L/min.)		