




**CONFIGURATION**

X	
C	.106 gpm (.4 L/min.)
N	
Material/Coating	

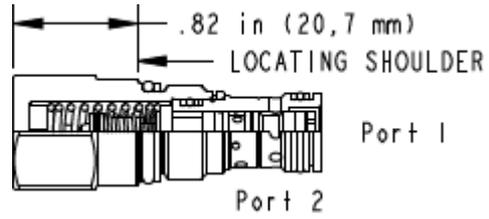

2 1

**TECHNICAL DATA** NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

	T-162A
	0
	11 L/min.
	350 bar
	19,1 mm
	27 - 33 Nm
	4 mm
	15 mm
	9 - 10 Nm
	0.07 kg.
Seal kit - Cartridge	Buna: 990-162-007
Seal kit - Cartridge	Polyurethane: 990-162-002
Seal kit - Cartridge	Viton: 990-162-006

# OPTION SELECTION EXAMPLE: FCBCXCN

	(X)	(C)	(N)	MATERIAL/COATING
<b>X</b>	-	<b>C</b> .106 gpm (.4 L/min.)	<b>N</b>	Standard Material/Coating
<b>C</b>	-	<b>D</b> .132 gpm (.49 L/min.)	<b>V</b>	<b>/AP</b>
<b>L</b>		<b>F</b> .198 gpm (.75 L/min.)		
		<b>G</b> .291 gpm (1.10 L/min.)		
		<b>H</b> .41 gpm (1.55 L/min.)		
		<b>J</b> .528 gpm (2.0 L/min.)		
		<b>K</b> .661 gpm (2.50 L/min.)		
		<b>L</b> .819 gpm (3.10 L/min.)		
		<b>M</b> 1.057 gpm (4.00 L/min.)		
		<b>N</b> 1.321 gpm (5.00 L/min.)		
		<b>P</b> 1.585 gpm (6.0 L/min.)		
		<b>R</b> 2.008 gpm (7.6 L/min.)		
		<b>S</b> 2.378 gpm (9.0 L/min.)		
		<b>T</b> 2.642 gpm (10.0 L/min.)		
		<b>V</b> 3.012 gpm (11.40 L/min.)		

## TECHNICAL FEATURES

- 2
- 
- Sun
- +/- 20%

## PERFORMANCE CURVES

