


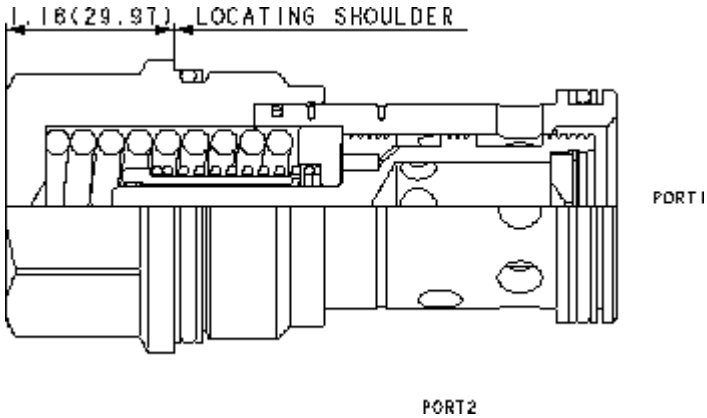

TECHNICAL DATA NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

cavidad	T-18A
Series	4
Capacity	200 L/min.
Maximum Operating Pressure	350 bar
Valve Hex Size	41,3 mm
Valve Installation Torque	474 - 508 Nm
Adjustment Screw Internal Hex Size	4 mm
Locknut Hex Size	15 mm
Locknut Torque	9 - 10 Nm
Model Weight	0.91 kg.
Seal kit - Cartridge	Buna: 990-018-007
Seal kit - Cartridge	Polyurethane: 990-018-002
Seal kit - Cartridge	Viton: 990-018-006
Seal kit - Cartridge	Buna: 990-018-007
Seal kit - Cartridge	Polyurethane: 990-018-002
Seal kit - Cartridge	Viton: 990-018-006

OPTION SELECTION EXAMPLE: FCFBXAN

CONTROL	(X)	SETTING RANGE	(A)	SEAL MATERIAL	(N)	MATERIAL/COATING
X Not Adjustable		A Replaceable Orifice .2 - 50 gpm (1 - 200 L/min.)		N Buna-N		Standard Material/Coating
C Tamper Resistant - Factory Set		B Permanent Orifice .2 - 50 gpm (1 - 200 L/min.)		V Viton		/AP Stainless Steel, Passivated
K manilla						
L Tuning Adjustment						

PERFORMANCE CURVES

