
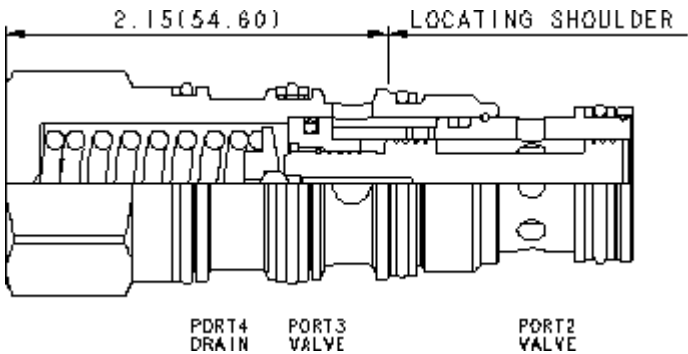


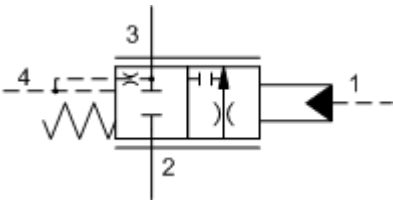

2 2 . 2 3 1 2 3 1

TECHNICAL DATA NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

	T-22A
	2
	40 L/min.
	350 bar
	4,9 cc
110 SUS (24 cSt)	30 cc/min. @70 bar
	7 bar
	0,8 mm
	± 2 %
-	5
	28,6 mm
	61 - 68 Nm
	4 mm
	15 mm
	9 - 10 Nm
	0.27 kg.
Seal kit - Cartridge	Buna: 990-022-002
Seal kit - Cartridge	Polyurethane: 990-022-002
Seal kit - Cartridge	Viton: 990-022-006
Seal kit - Cartridge	Buna: 990-022-002
Seal kit - Cartridge	Polyurethane: 990-022-002
Seal kit - Cartridge	Viton: 990-022-006

OPTION SELECTION EXAMPLE: FKDBXCNC

	(X)		(C)		(N)
X		C		N	
L				V	

TECHNICAL FEATURES

- LR*C-XHN LP*C-XHN
- 1 4 500psi 35bar
- 4 1
- L 50-300psi 3.5-20bar 100psi 7bar
- Sun

PERFORMANCE CURVES

