


0.68 (17.27) LOCATING SHOULDER

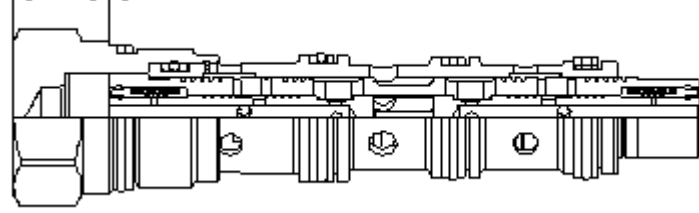

PORT 1

PORT 4

PORT 3

PORT 2

/

/

15%

**TECHNICAL DATA** NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

	T-32A
	2
	15 - 65 L/min.
	350 bar
	50% ±3.5%
	24 bar
	50% ±6.5%
	2 bar
	28,6 mm
	61 - 68 Nm
	0.27 kg.
Seal kit - Cartridge	Buna: 990-032-007
Seal kit - Cartridge	Polyurethane: 990-032-002
Seal kit - Cartridge	Viton: 990-032-006
Seal kit - Cartridge	Buna: 990-032-007
Seal kit - Cartridge	Polyurethane: 990-032-002
Seal kit - Cartridge	Viton: 990-032-006

## OPTION SELECTION EXAMPLE: FSDHXAN

(X)

(A)

(N)

X

A 50/50

N

V

### TECHNICAL FEATURES

- /
- 
- 
- 
- 
- 
- 
- 
- 
- 
- 
- Sun

0

### PERFORMANCE CURVES

Split	Input Flow		Rated Accuracy	Maximum Possible Flow Variation
	Max	Rated		
50:50	17 gpm	65 L/min	±3.5%	7.9 - 9.1 gpm
				30.2 - 34.8 L/min
	4 gpm	15 L/min	±6.5%	1.74 - 2.26 gpm
				6.5 - 8.5 L/min

The maximum possible variation is at 5000 psi (350 bar) differential between legs with the high pressure leg being the higher flow in dividing mode and the lower flow in combining mode.