
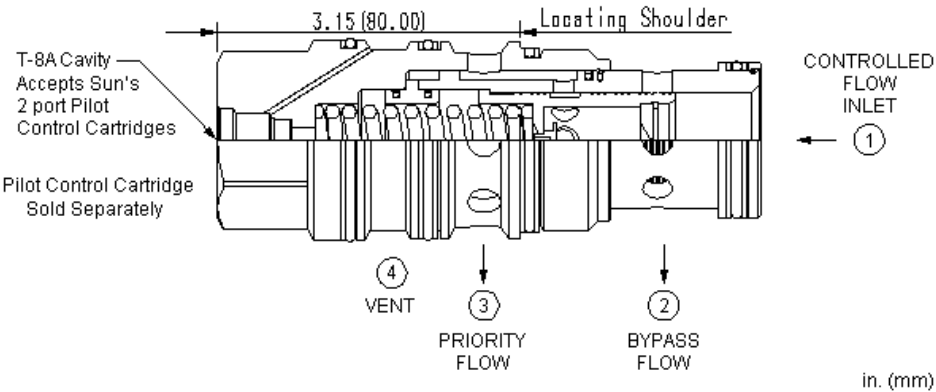


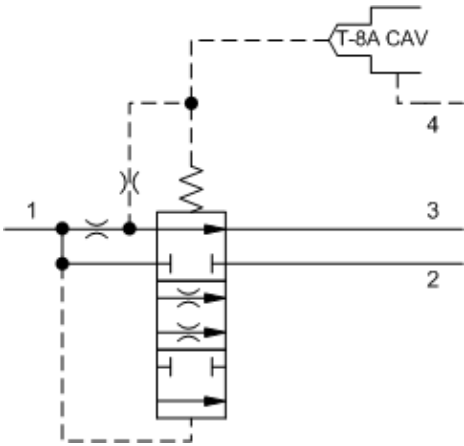

in. (mm)

/

T-8A

1

3

TECHNICAL DATA NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

	T-24A
	4
	200 L/min.
	350 bar
	T-8A
	22,2 mm
	27 - 33 Nm
	480 L/min.
	0,75 L/min.
	41,3 mm
	474 - 508 Nm
	1,30 kg
Seal kit - Cartridge	Buna: 990-024-007
Seal kit - Cartridge	EPDM: 990-024-014
Seal kit - Cartridge	Polyurethane: 990-024-002
Seal kit - Cartridge	Viton: 990-024-006

OPTION SELECTION EXAMPLE: FVFA8ANV

(A)

(V)

A .2 - 50 gpm (1 - 200 L/min.)

V

B .2 - 50 gpm (1 - 200 L/min.)

E EPDM

N

TECHNICAL FEATURES

- $\pm 10\%$
- T-8A 3 2
- 3 3000 psi (210 bar)
- -8 T-8A
-
-
- 4 1 150 psi (10,5 bar) 2
- 2 3
-
- -8 T-8A
- Sun /
- EPDM EPDM

PERFORMANCE CURVES

