




CONFIGURATION

L	
A	.1 - 3 gpm (0,4 - 11 L/min.)
N	
Material/Coating	

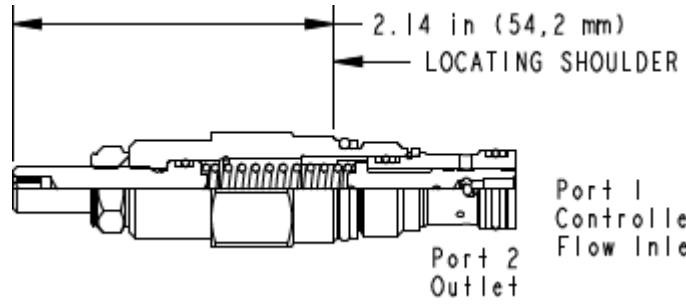

TECHNICAL DATA NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

	T-162A
	0
	11 L/min.
	350 bar
	19,1 mm
	27 - 33 Nm
	4 mm
	15 mm
	9 - 10 Nm
	0.10 kg.
Seal kit - Cartridge	Buna: 990-162-007
Seal kit - Cartridge	EPDM: 990-162-014
Seal kit - Cartridge	Polyurethane: 990-162-002
Seal kit - Cartridge	Viton: 990-162-006
Seal kit - Cartridge	Buna: 990-162-007
Seal kit - Cartridge	EPDM: 990-162-014
Seal kit - Cartridge	Polyurethane: 990-162-002
Seal kit - Cartridge	Viton: 990-162-006

OPTION SELECTION EXAMPLE: FXBALAN

(L)	(A)	(N)	MATERIAL/COATING	(/LH)
L	A .1 - 3 gpm (0,4 - 11 L/min.)	N	/LH -	
X		E EPDM	/AP	
		V	Standard Material/Coating	

TECHNICAL FEATURES

- $\pm 15\%$
- $\pm 20\%$
- 2
- Sun

PERFORMANCE CURVES

