




CONFIGURATION

L Control	Tuning Adjustment
A Setting Range	Replaceable Orifice .1 - 6 gpm (0,4 - 23 L/min.)
N Seal Material	Buna-N
	Material/Coating

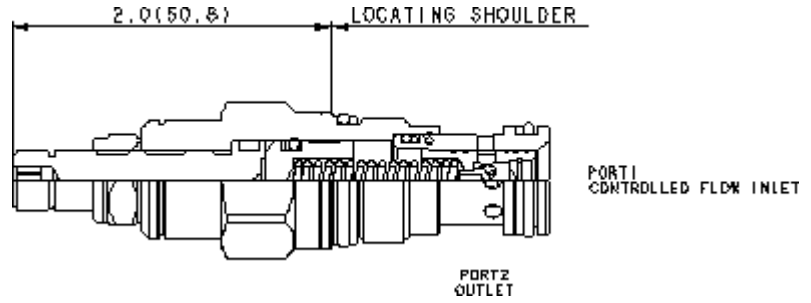

Fixed-orifice, pressure-compensated flow controls provide precise flow regulation for meter-in or meter-out applications where there may be wide pressure fluctuations. The flow setting is specified by the user and is set at the factory.

TECHNICAL DATA

Maximum Operating Pressure	5000 psi
Locknut Hex Size	9/16 in.
Locknut Torque	80 - 90 lbf in.
Seal kit - Cartridge	Buna: 990-010-007
Seal kit - Cartridge	EPDM: 990-010-014
Seal kit - Cartridge	Polyurethane: 990-010-002
Seal kit - Cartridge	Viton: 990-010-006

CONFIGURATION OPTIONS

Model Code Example: FXCALAN

CONTROL	(L)	SETTING RANGE	(A)	SEAL MATERIAL	(N)	MATERIAL/COATING	(/LH)
L Tuning Adjustment		A Replaceable Orifice .1 - 6 gpm (0,4 - 23 L/min.)		N Buna-N		/LH Mild Steel, Zinc-Nickel	
K Handknob				E EPDM		/AP Stainless Steel, Passivated	
X Not Adjustable				V Viton		Standard Material/Coating	