




CONFIGURATION

L Control	Tuning Adjustment
A Setting Range	Replaceable Orifice .1 - 6 gpm (0,4 - 23 L/min.)
N Seal Material	Buna-N
	Material/Coating

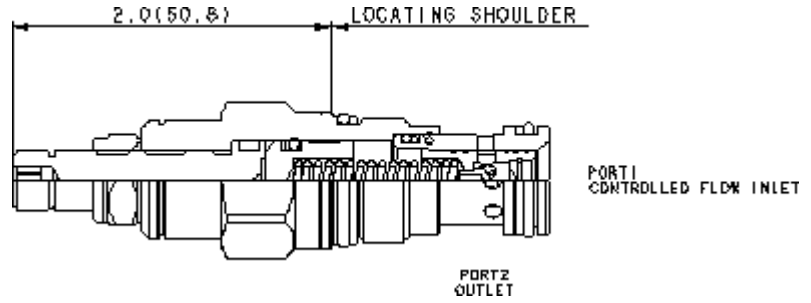

Fixed-orifice, pressure-compensated flow controls provide precise flow regulation for meter-in or meter-out applications where there may be wide pressure fluctuations. The flow setting is specified by the user and is set at the factory.

TECHNICAL DATA NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

Cavity	T-13A
Series	1
Capacity	6 gpm
Maximum Operating Pressure	5000 psi
Valve Hex Size	7/8 in.
Valve Installation Torque	30 - 35 lbf ft
Adjustment Screw Internal Hex Size	5/32 in.
Locknut Hex Size	9/16 in.
Locknut Torque	80 - 90 lbf in.
Model Weight	0.31 lb.
Seal kit - Cartridge	Buna: 990-010-007
Seal kit - Cartridge	EPDM: 990-010-014
Seal kit - Cartridge	Polyurethane: 990-010-002
Seal kit - Cartridge	Viton: 990-010-006

OPTION SELECTION EXAMPLE: FXCALAN

CONTROL	(L)	SETTING RANGE	(A)	SEAL MATERIAL	(N)	MATERIAL/COATING	(/LH)
L	Tuning Adjustment	A	Replaceable Orifice .1 - 6 gpm (0,4 - 23 L/min.)	N	Buna-N	/LH	Mild Steel, Zinc-Nickel
K	Handknob			E	EPDM	/AP	Stainless Steel, Passivated
X	Not Adjustable			V	Viton		Standard Material/Coating

TECHNICAL FEATURES

- Customer must specify a flow rating. Factory set flow ratings are within +/- 10% of the requested setting.
- Cartridges configured with EPDM seals are for use in systems with phosphate ester fluids. Exposure to petroleum based fluids, greases and lubricants will damage the seals.
- All 2-port flow control cartridges are physically and functionally interchangeable (i.e. same flow path, same cavity for a given frame size). However, cartridge extension dimensions from the mounting surface may vary.
- The sharp-edged orifice design minimizes flow variations due to viscosity changes.
- The tuneable control option provides +/- 25% variation from the nominal factory pre-set flow. Turn the adjustment clockwise to increase.
- Corrosion resistant cartridge valves are intended for use in corrosive environments and are identified by the model code suffix /AP for external stainless steel components, or /LH for external zinc-nickel plated components. See the CONFIGURATION section for all options. For further details, please see the Materials of Construction page located under TECH RESOURCES.
- Incorporates the Sun floating style construction to minimize the possibility of internal parts binding due to excessive installation torque and/or cavity/cartridge machining variations.

PERFORMANCE CURVES

