




CONFIGURATION

L Control	Tuning Adjustment
A Setting Range	Replaceable Orifice .1 - 6 gpm (0,4 - 23 L/min.)
N Seal Material	Buna-N
Material/Coating	

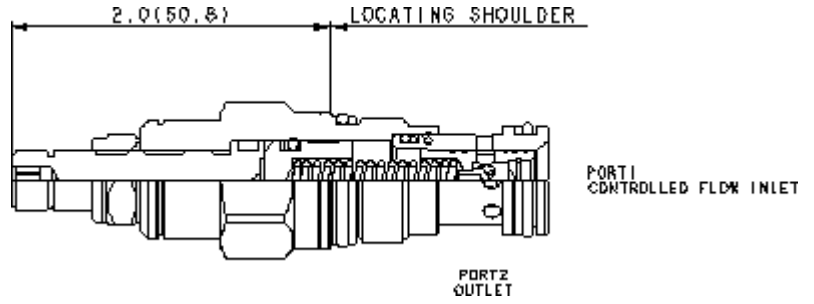

NOTE: DATA MAY VARY FROM TECHNICAL DATA SEE CONFIGURATION SECTION.

TECHNICAL DATA	
cavidad	T-13A
Series	1
Capacity	23 L/min.
Maximum Operating Pressure	350 bar
Valve Hex Size	22,2 mm
Valve Installation Torque	41 - 47 Nm
Adjustment Screw Internal Hex Size	4 mm
Locknut Hex Size	15 mm
Locknut Torque	9 - 10 Nm
Model Weight	0.14 kg.
Seal kit - Cartridge	Buna: 990-010-007
Seal kit - Cartridge	EPDM: 990-010-014
Seal kit - Cartridge	Polyurethane: 990-010-002
Seal kit - Cartridge	Viton: 990-010-006
Seal kit - Cartridge	Buna: 990-010-007
Seal kit - Cartridge	EPDM: 990-010-014
Seal kit - Cartridge	Polyurethane: 990-010-002
Seal kit - Cartridge	Viton: 990-010-006

OPTION SELECTION EXAMPLE: FXCALAN

CONTROL	(L)	SETTING RANGE	(A)	SEAL MATERIAL	(N)	MATERIAL/COATING	(/LH)
L	Tuning Adjustment	A	Replaceable Orifice .1 - 6 gpm (0,4 - 23 L/min.)	N	Buna-N	/LH	Mild Steel, Zinc-Nickel
C	Tamper Resistant - Factory Set			E	EPDM	/AP	Stainless Steel, Passivated
K	manilla			V	Viton		Standard Material/Coating
X	Not Adjustable						

PERFORMANCE CURVES

