




CONFIGURATION

L	
A	.1 - 6 gpm (0,4 - 23 L/min.)
N	
Material/Coating	

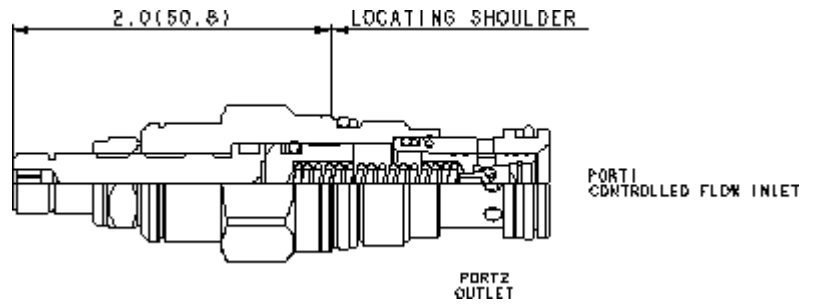

TECHNICAL DATA NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

	T-13A
	1
	23 L/min.
	350 bar
	22,2 mm
	41 - 47 Nm
	4 mm
	15 mm
	9 - 10 Nm
	0.14 kg.
Seal kit - Cartridge	Buna: 990-010-007
Seal kit - Cartridge	EPDM: 990-010-014
Seal kit - Cartridge	Polyurethane: 990-010-002
Seal kit - Cartridge	Viton: 990-010-006
Seal kit - Cartridge	Buna: 990-010-007
Seal kit - Cartridge	EPDM: 990-010-014
Seal kit - Cartridge	Polyurethane: 990-010-002
Seal kit - Cartridge	Viton: 990-010-006

OPTION SELECTION EXAMPLE: FXCALAN

	(L)	(A)	(N)	MATERIAL/COATING	(/LH)
L	A	.1 - 6 gpm (0,4 - 23 L/min.)	N	/LH	-
K			E EPDM	/AP	
X			V		Standard Material/Coating

TECHNICAL FEATURES

- ±10%
- EPDM
- 2
- ±25%
- "/AP"
- Sun

PERFORMANCE CURVES

