




CONFIGURATION

L	
A	.1 - 12 gpm (0,4 - 45 L/min.)
N	
Material/Coating	

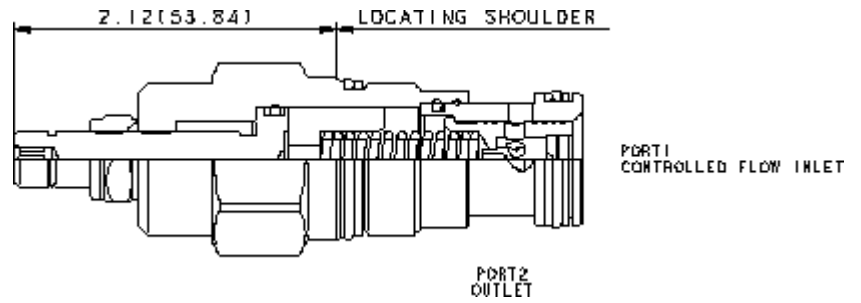

TECHNICAL DATA NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

	T-5A
	2
	45 L/min.
	350 bar
	28,6 mm
	61 - 68 Nm
	4 mm
	15 mm
	9 - 10 Nm
	0.26 kg.
Seal kit - Cartridge	Buna: 990-203-007
Seal kit - Cartridge	EPDM: 990-203-014
Seal kit - Cartridge	Viton: 990-203-006
Seal kit - Cartridge	Buna: 990-203-007
Seal kit - Cartridge	EPDM: 990-203-014
Seal kit - Cartridge	Viton: 990-203-006

OPTION SELECTION EXAMPLE: FXDALAN

	(L)	(A)	(N)	MATERIAL/COATING	(/LH)
L	A	.1 - 12 gpm (0,4 - 45 L/min.)	N	/LH	-
C	-		E	EPDM	/AP
K			V		Standard Material/Coating
X					

TECHNICAL FEATURES

- ±10%
- EPDM
- 2
- ±25%
- "/AP"
- Sun

PERFORMANCE CURVES

