


CONFIGURATION

X
D 50 psi (3,5 bar)

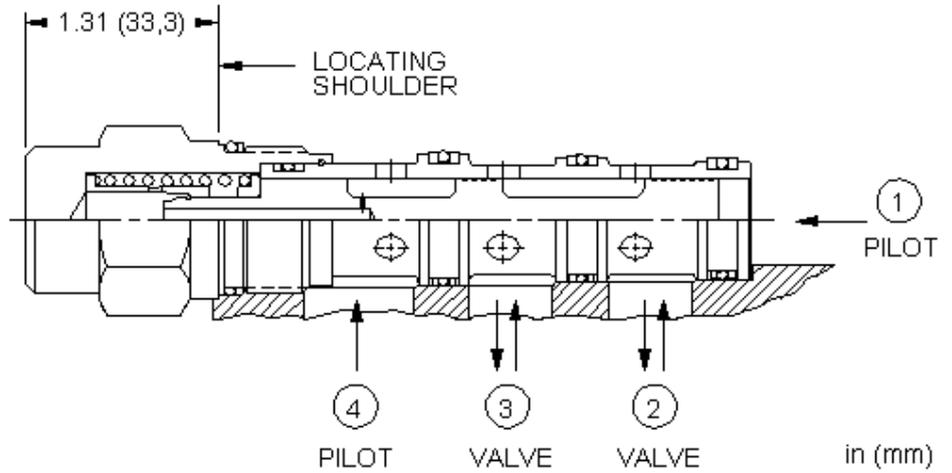

TECHNICAL DATA NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

| | |
|----------------------|---------------------------|
| | T-32A |
| | 2 |
| | 120 L/min. |
| | 350 bar |
| | 28,6 mm |
| | 61 - 68 Nm |
| | 0,30 kg |
| Seal kit - Cartridge | Buna: 990-032-007 |
| Seal kit - Cartridge | EPDM: 990-032-014 |
| Seal kit - Cartridge | Polyurethane: 990-032-002 |
| Seal kit - Cartridge | Viton: 990-032-006 |

OPTION SELECTION EXAMPLE: LHFTXDFN

(X)

(D)

(N)

X

D 50 psi (3,5 bar)

N

E 75 psi (5 bar)

E EPDM

F 100 psi (7 bar)

V

TECHNICAL FEATURES

- EPDM
- 5000 psi (350 bar)
- Sun /

PERFORMANCE CURVES

