


CONFIGURATION

X	Control	Not Adjustable
F	Nominal Control Pressure	100 psi (7 bar)
N	Seal Material	Buna-N

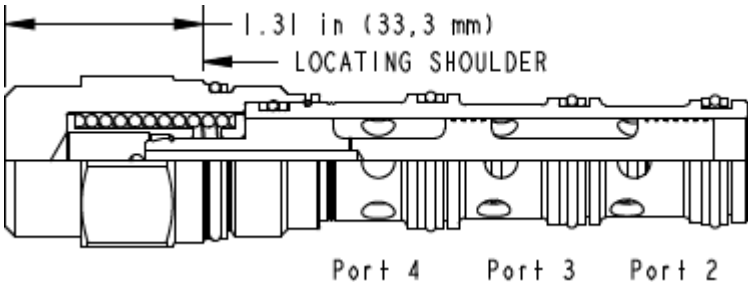

These bi-directional, normally open, modulating elements used with an external orifice, create a bi-directional, pressure compensated flow control.

TECHNICAL DATA

Maximum Operating Pressure	5000 psi
Seal kit - Cartridge	Buna: 990-032-007
Seal kit - Cartridge	EPDM: 990-032-014
Seal kit - Cartridge	Polyurethane: 990-032-002
Seal kit - Cartridge	Viton: 990-032-006

CONFIGURATION OPTIONS

Model Code Example: **LHFTXFN**

CONTROL	(X)	NOMINAL CONTROL PRESSURE	(F)	SEAL MATERIAL	(N)
X	Not Adjustable	F	100 psi (7 bar)	N	Buna-N
		D	50 psi (3,5 bar)	E	EPDM
		E	75 psi (5 bar)	V	Viton