
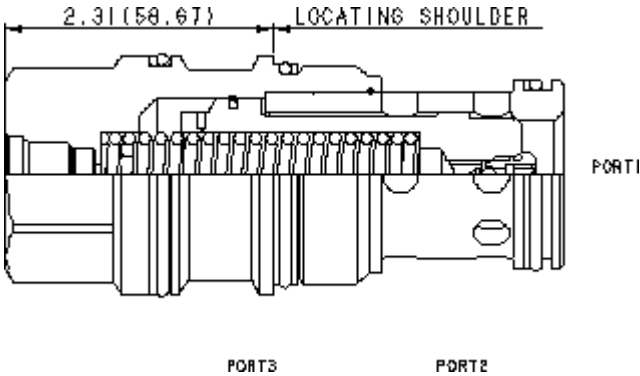


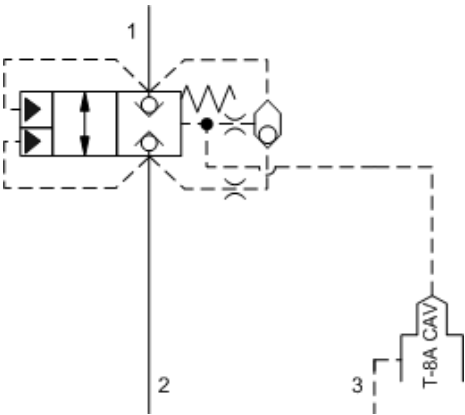

CONFIGURATION

Material/Coating

TECHNICAL DATA

NOTE:

	T-19A	DATA
	4	MAY
	760 L/min.	VARY
	350 bar	BY
	6,9 cc	
A3 A1	1.8:1	
A3 A2	2.25:1	
	T-8A	
	0,9 mm	
	41,3 mm	
	474 - 508 Nm	
Seal kit - Cartridge	Buna: 990-019-007	
Seal kit - Cartridge	Polyurethane: 990-019-002	
Seal kit - Cartridge	Viton: 990-019-006	

CONFIGURATION. SEE
CONFIGURATION SECTION.

OPTION SELECTION EXAMPLE: LOJD8DN

(V) MATERIAL/COATING

V	Standard Material/Coating
N	/LH -

TECHNICAL FEATURES

- 2
- T-8A T-8A
- T-8A T-8A
-
- 1 =100% 2 =80% =180%
-
- 5000 psi (350 bar)
- Sun /

PERFORMANCE CURVES

