

TECHNICAL DATA NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

cavidad	T-19AU
Series	4
Capacity	1100 L/min.
Maximum Operating Pressure	350 bar
Area Ratio, A3 to A1	1.8:1
Area Ratio, A3 to A2	2.25:1
Control Orifice Diameter	0,9 mm
Pilot Control Cavity	T-8A
Pilot Volume Displacement	7,7 cc
Valve Hex Size	41,3 mm
Valve Installation Torque	474 - 508 Nm
Model Weight	1,20 kg
Seal kit - Cartridge	Buna: 990-019-007
Seal kit - Cartridge	Polyurethane: 990-019-002
Seal kit - Cartridge	Viton: 990-019-006
Seal kit - Cartridge	Buna: 990-019-007
Seal kit - Cartridge	Polyurethane: 990-019-002
Seal kit - Cartridge	Viton: 990-019-006

OPTION SELECTION EXAMPLE: LOKA8N

SEAL MATERIAL


(N)

N Buna-N

V Viton

PERFORMANCE CURVES

Model LOKA8 installed in T-19AU Cavity

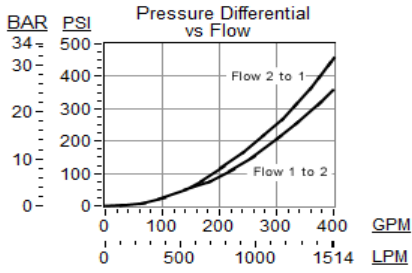

Model LOKA8 installed in T-19A Cavity

