

**CONFIGURATION**

—  
—

2

**TECHNICAL DATA** NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

	T-19AU
	4
	1100 L/min.
	350 bar
	7,7 cc
A3 A1	1.8:1
A3 A2	2.25:1
	T-8A
	0,9 mm
	41,3 mm
	474 - 508 Nm
	1,20 kg
Seal kit - Cartridge	Buna: 990-019-007
Seal kit - Cartridge	Polyurethane: 990-019-002
Seal kit - Cartridge	Viton: 990-019-006

: •

# OPTION SELECTION EXAMPLE: LOKB8N

(D)

(V)

**D** 50 psi (3,5 bar)

**V**


N

## TECHNICAL FEATURES

- Sun T-19A T-19AU
- 2
- T-8A T-8A
- T-8A T-8A
- 
- 1 =100% 2 =80% =180%
- 
- 5000 psi (350 bar)
- Sun /

## PERFORMANCE CURVES

Model LOKB8 installed in T-19AU Cavity

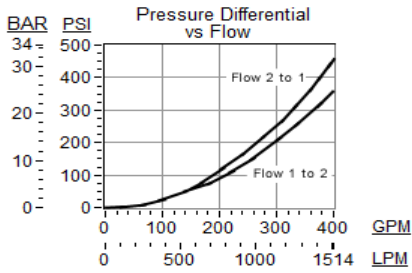

Model LOKB8 installed in T-19A Cavity

