


CONFIGURATION

X _____

 Material/Coating _____

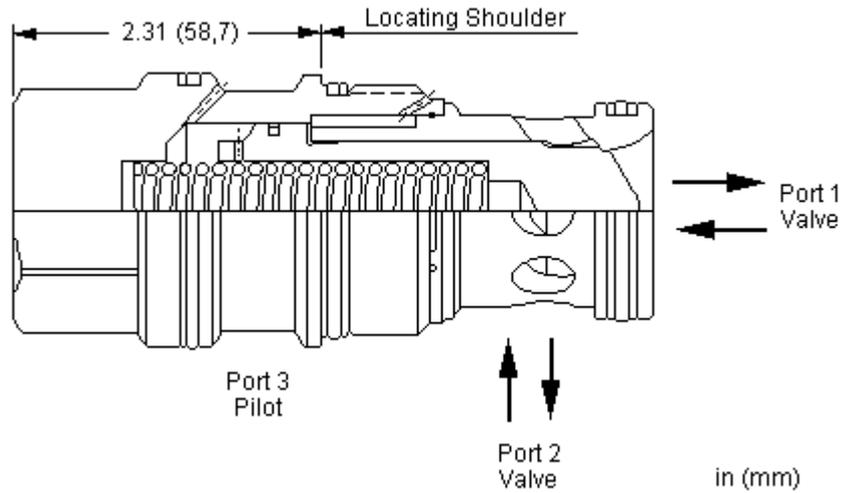

2 1 2 3 3 1

TECHNICAL DATA NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

	T-19AU
	4
	1100 L/min.
	350 bar
	7,7 cc
110 SUS (24 cSt)	0,7 cc/min.
A3 A1	1.8:1
A3 A2	2.25:1
	2,3 mm
	41,3 mm
	474 - 508 Nm
Seal kit - Cartridge	Buna: 990-019-007
Seal kit - Cartridge	EPDM: 990-019-014
Seal kit - Cartridge	Polyurethane: 990-019-002
Seal kit - Cartridge	Viton: 990-019-006

OPTION SELECTION EXAMPLE: LOKCXN

	(X)	(X)	(N)	(N)	(N)	(LH)
X	X	X	N	/LH	-	/LH
	D	0 psi (0 bar) 50 psi (3,5 bar)	E V	EPDM	/AP	Standard Material/Coating

TECHNICAL FEATURES

- Sun T-19A T-19AU
- EPDM
- 2
- 1 =100% 2 =80% =180%
- 5000 psi (350 bar)
- Sun /
- 3 3

PERFORMANCE CURVES

