

**TECHNICAL DATA** NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

cavidad	T-19AU
Series	4
Capacity	1100 L/min.
Maximum Operating Pressure	350 bar
Area Ratio, A3 to A1	1.8:1
Area Ratio, A3 to A2	2.25:1
Maximum Valve Leakage at 110 SUS (24 cSt)	0,7 cc/min.
Pilot Passage into Valve	2,3 mm
Pilot Volume Displacement	7,7 cc
Valve Hex Size	41,3 mm
Valve Installation Torque	474 - 508 Nm
Model Weight	1,20 kg
Seal kit - Cartridge	Buna: 990-019-007
Seal kit - Cartridge	Polyurethane: 990-019-002
Seal kit - Cartridge	Viton: 990-019-006
Seal kit - Cartridge	Buna: 990-019-007
Seal kit - Cartridge	Polyurethane: 990-019-002
Seal kit - Cartridge	Viton: 990-019-006

# OPTION SELECTION EXAMPLE: LOKOXN

**CONTROL**

**X** Not Adjustable

**P** External 1/4 NPTF Pilot Port, Port 3 Blocked

**(X)** SEAL MATERIAL

**N** Buna-N  
**E** EPDM  
**V** Viton


**(N)** MATERIAL/COATING

Standard Material/Coating

**/AP** Stainless Steel, Passivated

## PERFORMANCE CURVES

Model LOKO installed in T-19AU Cavity

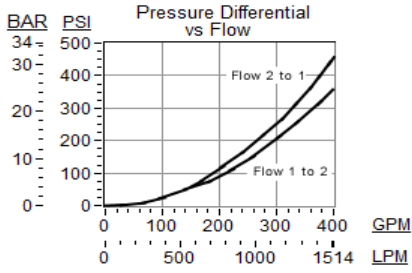

Model LOKO installed in T-19A Cavity

