


### CONFIGURATION

X	Control	Not Adjustable
F	Differential Pressure	100 psi (7 bar)
N	Seal Material	Buna-N
	Material/Coating	

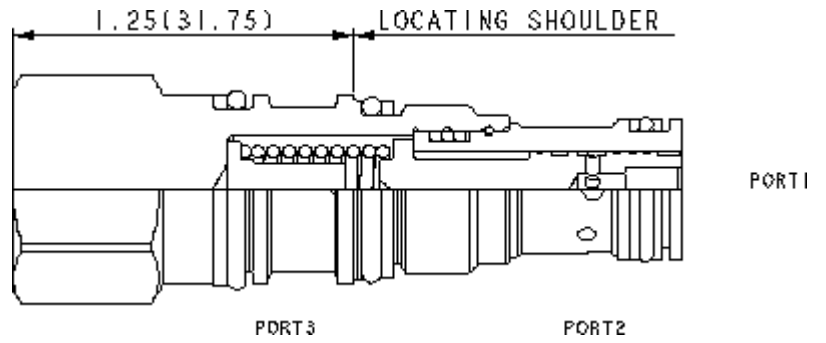

### TECHNICAL DATA

		NOTE:
cavidad	T-163A	DATA
Series	0	MAY
Capacity	30 L/min.	VARY
Maximum Operating Pressure	350 bar	BY
Valve Hex Size	19,1 mm	
Valve Installation Torque	27 - 33 Nm	
Seal kit - Cartridge	Buna: 990-163-007	
Seal kit - Cartridge	Polyurethane: 990-163-002	
Seal kit - Cartridge	Viton: 990-163-006	

CONFIGURATION. SEE  
CONFIGURATION SECTION.

## OPTION SELECTION EXAMPLE: LPBDXFN

CONTROL	(X)	DIFFERENTIAL PRESSURE	(F)	SEAL MATERIAL	(N)	MATERIAL/COATING
X	Not Adjustable	F	100 psi (7 bar)	N	Buna-N	Standard Material/Coating
		D	50 psi (3,5 bar)	V	Viton	/LH Mild Steel, Zinc-Nickel
		H	200 psi (14 bar)			