


CONFIGURATION

| | | |
|----------|-----------------------|------------------|
| X | Control | Not Adjustable |
| D | Differential Pressure | 50 psi (3,5 bar) |
| N | Seal Material | Buna-N |
| | Material/Coating | |

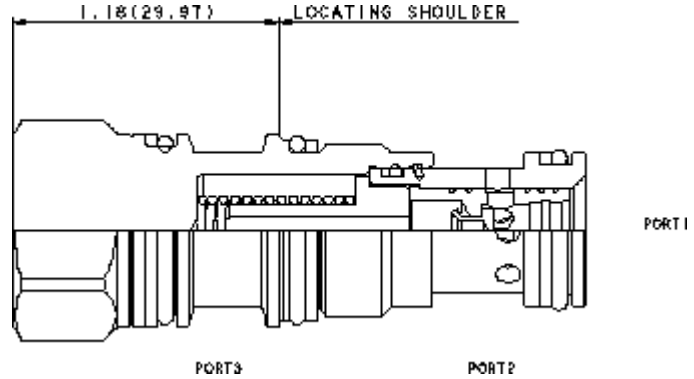

Normally open modulating elements without an internal orifice act as a restrictive compensator to maintain a constant pressure drop across an orifice, regardless of variations in upstream or downstream pressure.

TECHNICAL DATA

| | |
|----------------------------|---------------------------|
| Maximum Operating Pressure | 5000 psi |
| Seal kit - Cartridge | Buna: 990-011-007 |
| Seal kit - Cartridge | Polyurethane: 990-011-002 |
| Seal kit - Cartridge | Viton: 990-011-006 |

CONFIGURATION OPTIONS

Model Code Example: LPDCXDN

| CONTROL | (X) | DIFFERENTIAL PRESSURE | (D) | SEAL MATERIAL | (N) | MATERIAL/COATING | (/LH) |
|----------|----------------|-----------------------|------------------|---------------|--------|------------------|-----------------------------|
| X | Not Adjustable | D | 50 psi (3,5 bar) | N | Buna-N | /LH | Mild Steel, Zinc-Nickel |
| | | F | 100 psi (7 bar) | E | EPDM | /AP | Stainless Steel, Passivated |
| | | H | 200 psi (14 bar) | V | Viton | | Standard Material/Coating |