


### CONFIGURATION

<b>X</b> Control	Not Adjustable
<b>D</b> Differential Pressure	50 psi (3,5 bar)
<b>N</b> Seal Material	Buna-N
Material/Coating	

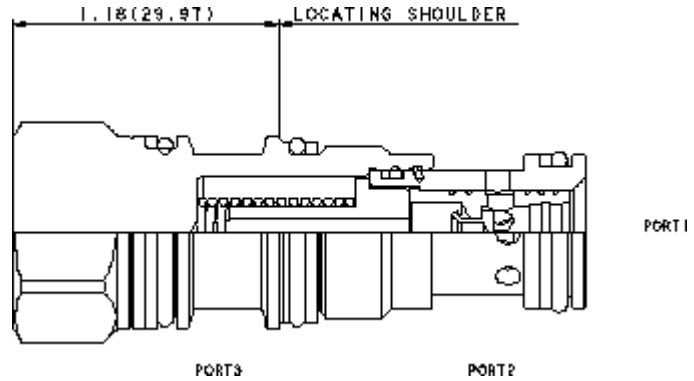

Normally open modulating elements without an internal orifice act as a restrictive compensator to maintain a constant pressure drop across an orifice, regardless of variations in upstream or downstream pressure.

### TECHNICAL DATA NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

Cavity	T-11A
Series	1
Capacity	15 gpm
Maximum Operating Pressure	5000 psi
Valve Hex Size	7/8 in.
Valve Installation Torque	30 - 35 lbf ft
Seal kit - Cartridge	Buna: 990-011-007
Seal kit - Cartridge	Polyurethane: 990-011-002
Seal kit - Cartridge	Viton: 990-011-006

## OPTION SELECTION EXAMPLE: LPDCXDN

CONTROL	(X) DIFFERENTIAL PRESSURE	(D) SEAL MATERIAL	(N) MATERIAL/COATING
<b>X</b> Not Adjustable	<b>D</b> 50 psi (3,5 bar)	<b>N</b> Buna-N	<b>/LH</b> Mild Steel, Zinc-Nickel
	<b>F</b> 100 psi (7 bar)	<b>E</b> EPDM	<b>/AP</b> Stainless Steel, Passivated
	<b>H</b> 200 psi (14 bar)	<b>V</b> Viton	Standard Material/Coating

### TECHNICAL FEATURES

- Cartridges configured with EPDM seals are for use in systems with phosphate ester fluids. Exposure to petroleum based fluids, greases and lubricants will damage the seals.
- If a higher compensating pressure is needed consider using a direct-acting reducer; PR\*R.
- All ports will accept 5000 psi (350 bar).
- Corrosion resistant cartridge valves are intended for use in corrosive environments and are identified by the model code suffix /AP for external stainless steel components, or /LH for external zinc-nickel plated components. See the CONFIGURATION section for all options. For further details, please see the Materials of Construction page located under TECH RESOURCES.
- Incorporates the Sun floating style construction to minimize the possibility of internal parts binding due to excessive installation torque and/or cavity/cartridge machining variations.

### PERFORMANCE CURVES

