


### CONFIGURATION

X	Control	Not Adjustable
D	Differential Pressure	50 psi (3,5 bar)
N	Seal Material	Buna-N
	Material/Coating	

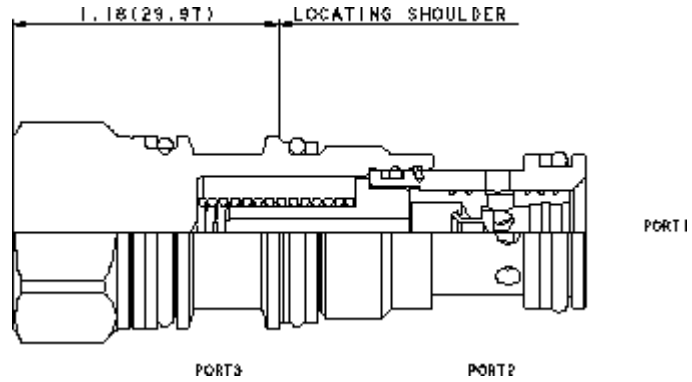

### TECHNICAL DATA

NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

cavidad	T-11A
Series	1
Capacity	60 L/min.
Maximum Operating Pressure	350 bar
Valve Hex Size	22,2 mm
Valve Installation Torque	41 - 47 Nm
Seal kit - Cartridge	Buna: 990-011-007
Seal kit - Cartridge	Polyurethane: 990-011-002
Seal kit - Cartridge	Viton: 990-011-006
Seal kit - Cartridge	Buna: 990-011-007
Seal kit - Cartridge	Polyurethane: 990-011-002
Seal kit - Cartridge	Viton: 990-011-006

# OPTION SELECTION EXAMPLE: LPDCXDN

CONTROL	(X) DIFFERENTIAL PRESSURE	(D) SEAL MATERIAL	(N) MATERIAL/COATING
<b>X</b> Not Adjustable	<b>D</b> 50 psi (3,5 bar)	<b>N</b> Buna-N	<b>/LH</b> Mild Steel, Zinc-Nickel
	<b>F</b> 100 psi (7 bar)	<b>E</b> EPDM	<b>/AP</b> Stainless Steel, Passivated
	<b>H</b> 200 psi (14 bar)	<b>V</b> Viton	Standard Material/Coating

## PERFORMANCE CURVES

