


CONFIGURATION

X	Control	Not Adjustable
H	Differential Pressure	200 psi (14 bar)
N	Seal Material	Buna-N
	Material/Coating	

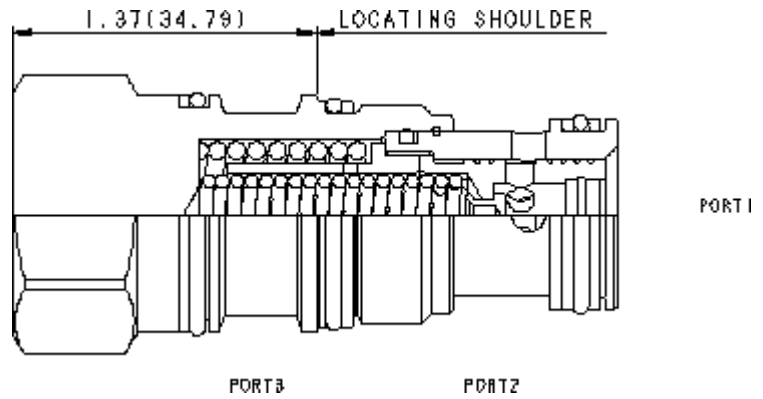

TECHNICAL DATA

NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

cavidad	T-2A
Series	2
Capacity	120 L/min.
Maximum Operating Pressure	350 bar
Valve Hex Size	28,6 mm
Valve Installation Torque	61 - 68 Nm
Seal kit - Cartridge	Buna: 990-202-007
Seal kit - Cartridge	Polyurethane: 990-002-002
Seal kit - Cartridge	Viton: 990-202-006
Seal kit - Cartridge	Buna: 990-202-007
Seal kit - Cartridge	Polyurethane: 990-002-002
Seal kit - Cartridge	Viton: 990-202-006

OPTION SELECTION EXAMPLE: LPFCXHN

CONTROL	(X) DIFFERENTIAL PRESSURE	(H) SEAL MATERIAL	(N) MATERIAL/COATING
X Not Adjustable	H 200 psi (14 bar)	N Buna-N	/LH Mild Steel, Zinc-Nickel
	F 100 psi (7 bar)	E EPDM	/AP Stainless Steel, Passivated
	G 150 psi (10,5 bar)	V Viton	Standard Material/Coating

PERFORMANCE CURVES

