


CONFIGURATION

X	
H	200 psi (14 bar)
N	
Material/Coating	

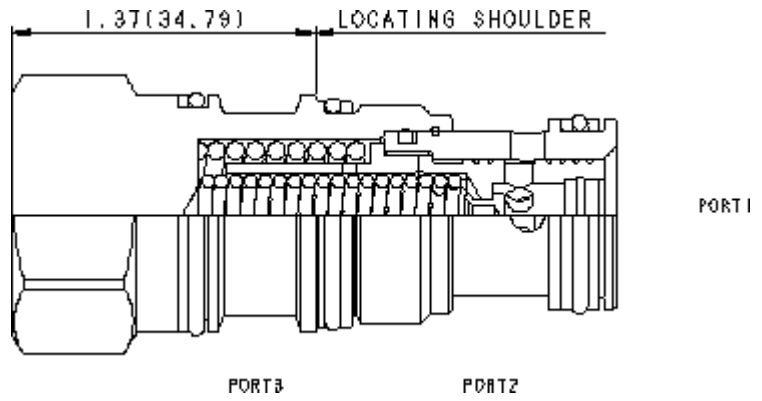

TECHNICAL DATA NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

	T-2A
	2
	120 L/min.
	350 bar
	28,6 mm
	61 - 68 Nm
Seal kit - Cartridge	Buna: 990-202-007
Seal kit - Cartridge	Polyurethane: 990-002-002
Seal kit - Cartridge	Viton: 990-202-006
Seal kit - Cartridge	Buna: 990-202-007
Seal kit - Cartridge	Polyurethane: 990-002-002
Seal kit - Cartridge	Viton: 990-202-006

OPTION SELECTION EXAMPLE: LPFCXHN

	(X)	(H)	(N)	MATERIAL/COATING	(/LH)
X	H 200 psi (14 bar)	N	/LH	-	
	D 50 psi (3,5 bar)	E EPDM		/AP	
	F 100 psi (7 bar)	V			Standard Material/Coating
	G 150 psi (10,5 bar)				

TECHNICAL FEATURES

- PR*R
- L
- 5000 psi (350 bar)
- /AP
- Sun /

316

PERFORMANCE CURVES

