
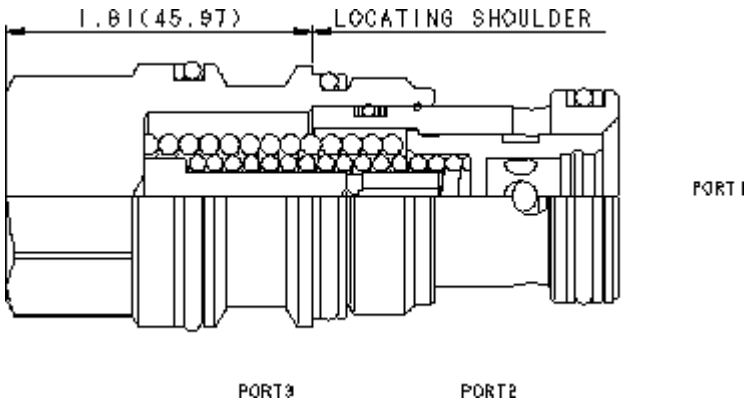




Normally open modulating elements without an internal orifice act as a restrictive compensator to maintain a constant pressure drop across an orifice, regardless of variations in upstream or downstream pressure.

TECHNICAL DATA NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

Maximum Operating Pressure	5000 psi
Seal kit - Cartridge	Buna: 990-017-007
Seal kit - Cartridge	EPDM: 990-017-014
Seal kit - Cartridge	Polyurethane: 990-017-002
Seal kit - Cartridge	Viton: 990-017-006

CONFIGURATION OPTIONS

CONTROL	(X)	DIFFERENTIAL PRESSURE	(H)	SEAL MATERIAL	(N)	MATERIAL/COATING
X Not Adjustable		H 200 psi (14 bar)		N Buna-N		Standard Material/Coating
		D 50 psi (3,5 bar)		E EPDM		/AP Stainless Steel, Passivated
		F 100 psi (7 bar)		V Viton		/LH Mild Steel, Zinc-Nickel
		G 150 psi (10,5 bar)				

Model Code Example: LPHCXHN