




CONFIGURATION

Differential Pressure

Seal Material

Material/Coating

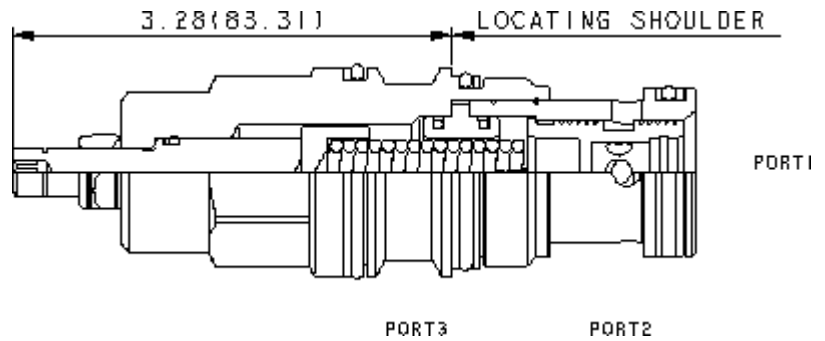

Normally open modulating elements without an internal orifice act as a restrictive compensator to maintain a constant pressure drop across an orifice, regardless of variations in upstream or downstream pressure.

TECHNICAL DATA

Maximum Operating Pressure	5000 psi
Seal kit - Cartridge	Buna: 990-017-007
Seal kit - Cartridge	EPDM: 990-017-014
Seal kit - Cartridge	Polyurethane: 990-017-002
Seal kit - Cartridge	Viton: 990-017-006

CONFIGURATION OPTIONS

Model Code Example: LPHCLN

DIFFERENTIAL PRESSURE

(D)

SEAL MATERIAL

(N)

MATERIAL/COATING

D 50 psi (3,5 bar)

N Buna-N

Standard Material/Coating

E EPDM

/LH Mild Steel, Zinc-Nickel

V Viton