


### CONFIGURATION

X	Control	Not Adjustable
H	Differential Pressure	200 psi (14 bar)
N	Seal Material	Buna-N
	Material/Coating	

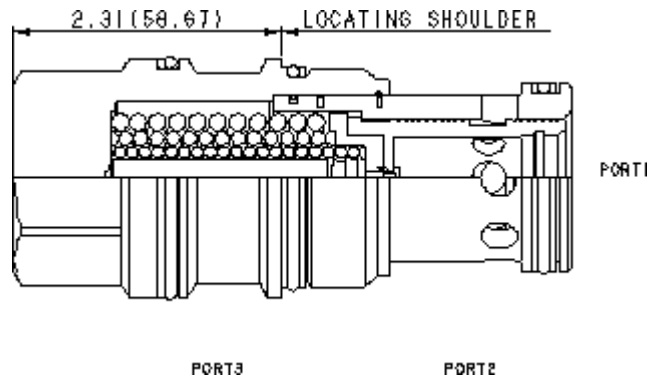

### TECHNICAL DATA

NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

cavidad	T-19A
Series	4
Capacity	480 L/min.
Maximum Operating Pressure	350 bar
Valve Hex Size	41,3 mm
Valve Installation Torque	474 - 508 Nm
Seal kit - Cartridge	Buna: 990-019-007
Seal kit - Cartridge	Polyurethane: 990-019-002
Seal kit - Cartridge	Viton: 990-019-006
Seal kit - Cartridge	Buna: 990-019-007
Seal kit - Cartridge	Polyurethane: 990-019-002
Seal kit - Cartridge	Viton: 990-019-006

# OPTION SELECTION EXAMPLE: LPJCXHN

CONTROL	(X)	DIFFERENTIAL PRESSURE	(H)	SEAL MATERIAL	(N)	MATERIAL/COATING	(/LH)
<b>X</b> Not Adjustable		<b>H</b> 200 psi (14 bar)		<b>N</b> Buna-N		<b>/LH</b> Mild Steel, Zinc-Nickel	
<b>P</b> External 1/4 NPTF Pilot Port, Port 3 Blocked		<b>F</b> 100 psi (7 bar)		<b>E</b> EPDM		<b>/AP</b> Stainless Steel, Passivated	
		<b>G</b> 150 psi (10,5 bar)		<b>V</b> Viton		Standard Material/Coating	

## PERFORMANCE CURVES

