


CONFIGURATION

X	Control	Not Adjustable
	Seal Material	

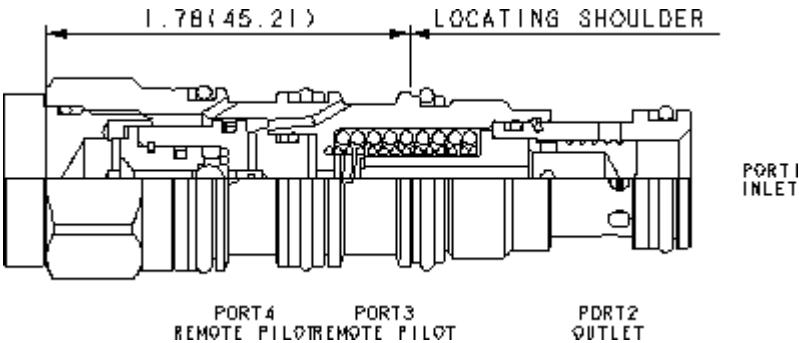

A normally closed modulating element, used as a bypass compensator, ensures a constant pressure drop across an external orifice to create a pressure compensated flow control. The resulting flow remains constant regardless of variations in upstream or downstream pressure. A ball shuttle connects the after orifice signal from the higher of port 3 or 4 to the pilot area.

TECHNICAL DATA

Maximum Operating Pressure	5000 psi
Nominal Compensating Pressure	200 psi
Seal kit - Cartridge	Buna: 990-021-007
Seal kit - Cartridge	Polyurethane: 990-021-002
Seal kit - Cartridge	Viton: 990-021-006

CONFIGURATION OPTIONS

Model Code Example: LRDSXHN

CONTROL	(X)	SEAL MATERIAL	(V)
X Not Adjustable		V Viton	
		N Buna-N	