


**CONFIGURATION**

X	Control	Not Adjustable
	Seal Material	

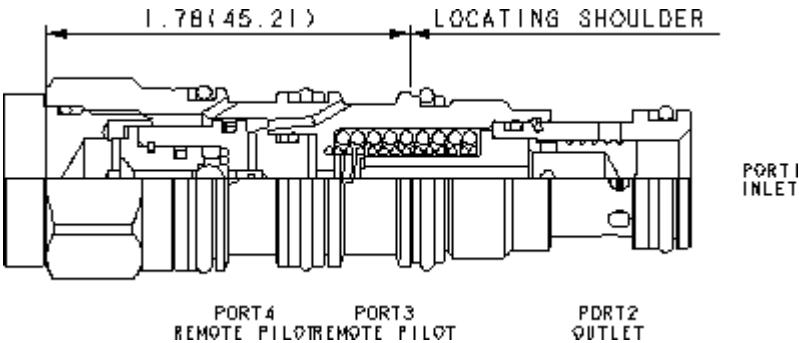

A normally closed modulating element, used as a bypass compensator, ensures a constant pressure drop across an external orifice to create a pressure compensated flow control. The resulting flow remains constant regardless of variations in upstream or downstream pressure. A ball shuttle connects the after orifice signal from the higher of port 3 or 4 to the pilot area.

**TECHNICAL DATA** NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

Cavity	T-21A
Series	1
Capacity	15 gpm
Maximum Operating Pressure	5000 psi
Nominal Compensating Pressure	200 psi
Valve Hex Size	7/8 in.
Valve Installation Torque	30 - 35 lbf ft
Seal kit - Cartridge	Buna: 990-021-007
Seal kit - Cartridge	Polyurethane: 990-021-002
Seal kit - Cartridge	Viton: 990-021-006

OPTION SELECTION EXAMPLE: LRDSXHN

CONTROL	(X)	SEAL MATERIAL	(V)
X	Not Adjustable	V	Viton
		N	Buna-N

TECHNICAL FEATURES

- The shuttle features hardened steel balls and seats for excellent wear characteristics and contamination tolerance.
- The single ball shuttle allows for the decay of the pressure signal when both load ports drop to a lower pressure.
- All ports will accept 5000 psi (350 bar).
- Incorporates the Sun floating style construction to minimize the possibility of internal parts binding due to excessive installation torque and/or cavity/cartridge machining variations.