


**CONFIGURATION**

<b>X</b> Control	Not Adjustable
<b>F</b> Differential Pressure	100 psi (7 bar)
<b>N</b> Seal Material	Buna-N
Material/Coating	

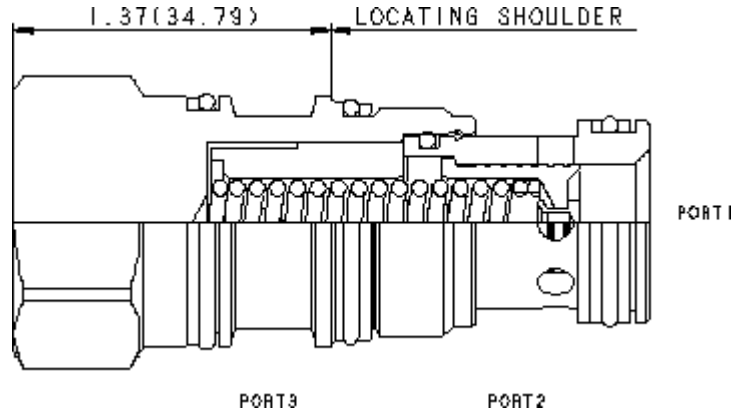

Normally closed modulating elements without an internal orifice act as a bypass compensator to maintain a constant pressure drop across an orifice, regardless of variations in upstream or downstream pressure.

**TECHNICAL DATA**

Maximum Operating Pressure	5000 psi
Seal kit - Cartridge	Buna: 990-202-007
Seal kit - Cartridge	Polyurethane: 990-002-002
Seal kit - Cartridge	Viton: 990-202-006

**CONFIGURATION OPTIONS**

**Model Code Example: LRFCXFN**

CONTROL	(X)	DIFFERENTIAL PRESSURE	(F)	SEAL MATERIAL	(N)	MATERIAL/COATING	(/LH)
<b>X</b> Not Adjustable		<b>F</b> 100 psi (7 bar)		<b>N</b> Buna-N		<b>/LH</b> Mild Steel, Zinc-Nickel	
		<b>D</b> 50 psi (3,5 bar)		<b>E</b> EPDM		<b>/AP</b> Stainless Steel, Passivated	
		<b>G</b> 150 psi (10,5 bar)		<b>V</b> Viton		Standard Material/Coating	
		<b>H</b> 200 psi (14 bar)					