




CONFIGURATION

Differential Pressure

Seal Material

Material/Coating

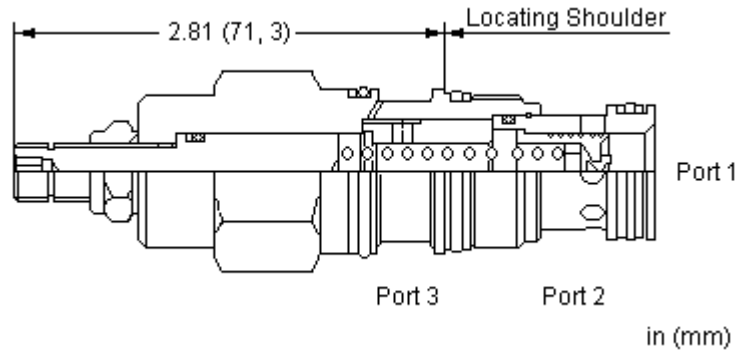

Normally closed modulating elements without an internal orifice act as a bypass compensator to maintain a constant pressure drop across an orifice, regardless of variations in upstream or downstream pressure.

TECHNICAL DATA

Maximum Operating Pressure	5000 psi
Seal kit - Cartridge	Buna: 990-202-007
Seal kit - Cartridge	Polyurethane: 990-002-002
Seal kit - Cartridge	Viton: 990-202-006

CONFIGURATION OPTIONS

Model Code Example: LRFCLN

DIFFERENTIAL PRESSURE

(E)

SEAL MATERIAL

(N)

MATERIAL/COATING

(/LH)

E 75 psi (5 bar)

D 50 psi (3,5 bar)

F 100 psi (7 bar)

N Buna-N

E EPDM

V Viton

/LH Mild Steel, Zinc-Nickel

/AP Stainless Steel, Passivated

Standard Material/Coating